

# MB-D5330

# USER MANUAL




# Welcome Guide

PLEASE READ THIS INFORMATION BEFORE USING THE PHONE TO MAKE A BETTER USE OF YOUR PHONE. WE ARE NOT RESPONSIBLE FOR ANY DAMAGE DUE TO YOUR MISUNDERSTANDING OF THIS INFORMATION AND MISACTTING.


We are endeavoring to improve our products and services. We reserve all the rights to revise and change the description of this product and its software as well as this user's manual without obligation to notify any person of such revisions and changes.

This user manual is for your better use of this phone not an approval of any accessories. All the pictures in this manual are for reference only. There may be slight difference between the appearance of phone/ keys/ contents of display used in this manual and those of your phone. Please refer to your phone for actuality. Some features introduced in this manual are network or subscription-supported features. Please contact your service provider for further information.

## MB-D5330 Introduction

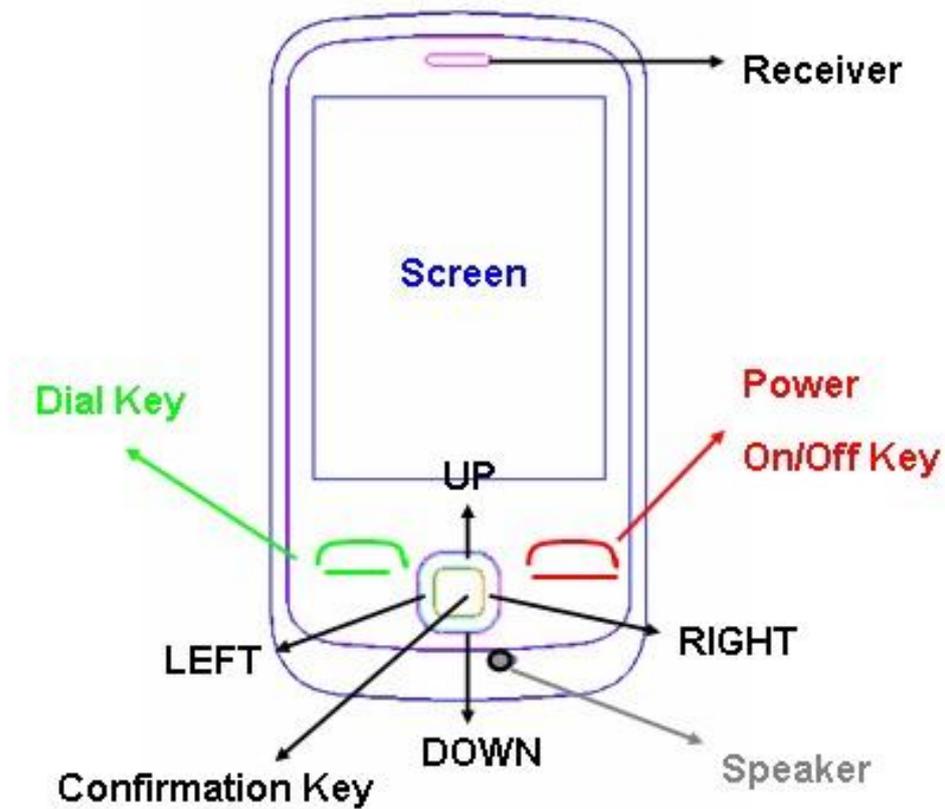

## MB-D5330 Bottom Profile

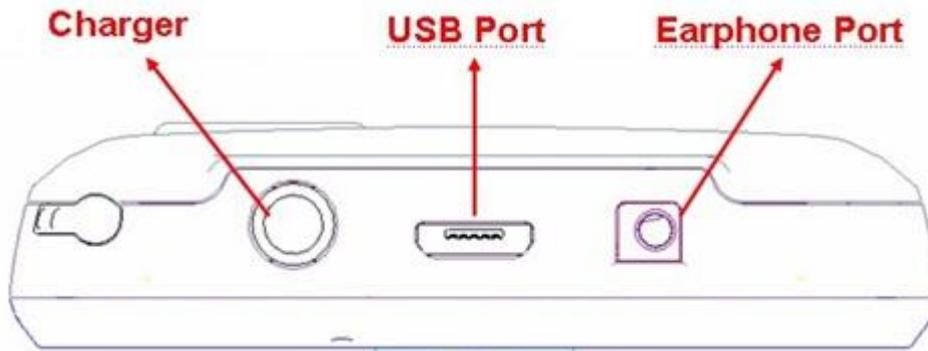

## MB-D5330 Side Profile



**Note:** All the illustrations, simulated screen and related images used in this manual are for reference only. Please refer to your handset for actuality.

# Content List


---

1. Safety Information.....	7
2. Use and Care.....	9
3. Essential.....	10
3.1 Install SIM Card.....	10
3.2 Battery Use and Installation.....	11
3.3 Memory Card.....	12
3.4 Turn it on/off.....	13
3.5 Make a call.....	13
3.6 Answer or Reject a call.....	13
3.7 Operations in a Call.....	14
3.8 Insert International Access Code.....	14
3.9 Dial a Extension or Voicemail Number.....	15
3.10 Emergency Calls.....	15
4. Basic.....	15
4.1 Display.....	15
4.4 Keypad Lock.....	18
4.5 Password.....	18
5. Functions.....	18
6. File Manager.....	20
7. Phonebook.....	21
8. Fun & Games.....	22
9. Call Center.....	23
9.1 Call History.....	23
9.2 Call Settings.....	25
10. Messaging.....	26
10.1 Write Message.....	26
10.2 Inbox.....	26
10.3 Drafts.....	27
10.4 Outbox.....	27
10.5 MMS.....	28
10.6 Email.....	30
10.7 Broadcast Message.....	31
10.8 Templates.....	31
10.9 SMS Settings.....	31
11. Multimedia.....	32
11.1 Camera.....	32
11.2 Image Viewer.....	33
11.3 Video Recorder.....	33
11.4 Media Player.....	34

---

11.5 Sound Recorder.....	35
11.6 FM Radio .....	36
12. Organizer .....	37
12.1 Calendar .....	37
12.2 Tasks.....	37
12.3 Alarm.....	38
12.4 World Clock .....	38
13 Settings.....	38
13.1 Dual SIM Settings .....	39
13.2 Pen Calibration .....	39
13.3 Phone Settings.....	39
13.4 Network Settings .....	40
13.5 Security Settings .....	40
13.6 Connectivity .....	41
13.7 Restore Factory Settings.....	41
13.8 Sound Effects .....	42
14. User profiles.....	42
15. Extra .....	42
15.1 Calculator .....	42
15.2 Stop Watch .....	43
15.2 Ebook Reader .....	43
16. Services.....	43
Malfunctions & Measures.....	45
Specific Absorption Rate Data.....	47
Battery Tips.....	48
Product Maintenance.....	49

## 1. Safety Information



Read this information before using your mobile device otherwise may result in personal injury or your device not complying with local laws.

### **Battery:**

If a conductive material such touches the exposed terminal, short circuit may occur resulting in property damage, bodily injury or burn. To avoid risk of leaking electricity, take care when handling a charged battery particularly when placing it inside your pocket, purse or other container with metal objects.

### **Keep your mobile device from water:**

Keep your mobile device dry.

### **Use while driving**

Always obey the laws and regulations on the use of mobile devices in the area where you drive. Pay full attention to driving on the road. Use hand-free operation or earpiece if a call is needed.

### **Aircraft**

Mobile device may cause harmful interference so turn off your mobile device before boarding an airplane.

### **Blasting areas**

Always obey the related limits and regulations and do not use your mobile device in blasting areas. Turn off your mobile device in areas posted “turn off electronic devices”.

### **Potentially explosive atmospheres**

Turn off your mobile device in the gas station and areas near fuel and chemical containers. Turn off your mobile device in areas posted “turn off electronic devices”.

### **Medical devices**

Turn off your mobile device whenever instructed to do so by posted signs near some medical equipment. Mobile device may interfere with pacemakers, hearing aids and some other medical transplanting equipment. Do not put your mobile device near pacemakers nor carry in the breast pocket.

**Accessories and battery**

Use the accessories, batteries and chargers approved by manufacturer. Use of batteries not approved by manufacturer may cause injury.

**Emergency calls**

Turn on your phone and keep it in service areas, dial emergency phone numbers and then press send key to make a call.

**When losing your phone**

To avoid any economy damage, please inform the Tele-communication Company or agencies to lock your SIM card when you lost your phone.

When you inform the telecom company or agencies to lock your SIM card they need to know the IMEI No. of your phone, which you can find printed on the label on the back of your phone when taking off the battery. Please backup this number for future need

For safety consideration, you can make preventative measures such as set PIN Code for your SIM card to prevent other persons using your SIM card without your permission.

**Keep away from children**

Keep the phone, battery and charger away from children to avoid any personal injury.

## 2. Use and Care

---

To take care for this mobile device, please keep it away from:



**Any kind of fluid**

Keep the device away from water, rain, humidity, sweat or other moisture.



**Extreme heat or cold**

Avoid the temperature below  $-10^{\circ}\text{C}/14^{\circ}\text{F}$  or above  $45^{\circ}\text{C}/113^{\circ}\text{F}$ .



**Microwave**

Don't try to dry your phone in a microwave oven.



**Dust and dirt**

Don't expose your phone to dust, dirt, sand, food or other inappropriate materials.



**Cleaning solutions**

Use only a dry soft cloth to clean your phone. Don't use alcohol or other cleaning solutions.



**Ground**

Don't drop your phone.

## 3. Essential

### 3.1 Install SIM Card

Keep your SIM cards away from the children.

Please consult your SIM card franchiser about the services and usage. SIM franchiser can be the service provider, network provider or other franchisers.

Please turn off your mobile device and disconnect it with charger before removing the battery.


**Note:** Turn off your mobile device and disconnect it with charger or any other device before removing battery door. Place the door on the phone before store and use your mobile phone.

1. Remove the battery door:


Press and jog the battery door let it glide to the bottom of the phone, then get the battery door off.

2. Insert the SIM card into the card slot:

You can see two card slots side by side. Arrowed position shows SIM card slot. Please insert SIM card with the right direction as the picture shows below.

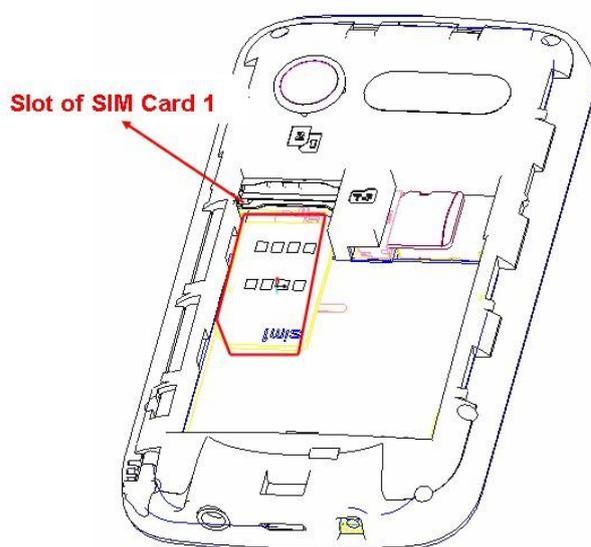

SIM Card 1

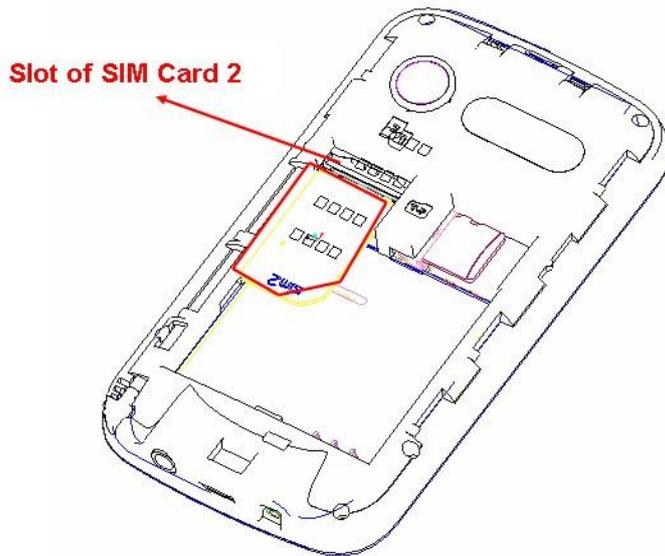

SIM Card 2

## 3.2 Battery Use and Installation

### Battery Tips

Battery life depends on the network, signal strength, temperature, and accessories you use. Always use Original batteries and chargers. The warranty does not cover damage caused by non-original batteries, charger and/or accessories.

New batteries or batteries stored for a long time may take more time to charge

When charging your battery, keep it near room temperature.

When storing your battery, keep it uncharged in a cool, dark, dry place.

Never expose batteries to temperatures below -10°C (14°F) or above 45°C (113°F).


Always take your phone with you when you leave your vehicle.

It is normal for batteries to gradually wear down and require longer charging times. If you notice a change in your battery life, it is probably time to purchase a new battery.

Never dispose of batteries in a fire because they may explode.

### Battery Installation

1. Slide the battery door up and then remove the door.
2. Aim the metal terminals of the battery at those in the battery compartment and then push down and into it.

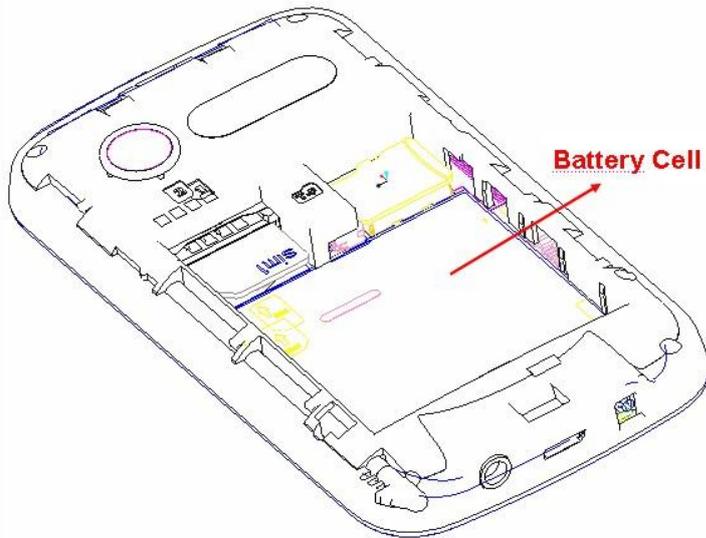

### Battery Charging:


New batteries are not fully charged. Open the protective cover on your phone's accessory connector port, then insert the battery charger plug into the accessory connector port on the side of your phone as shown, and plug the other end into an electrical outlet. Your phone might require several hours to charge fully. When your phone is power off, it might take a few seconds to show charging display and it shows charge complete when finished. When your phone is power on, the battery icon flickers when it starting charging and become still with full bars in battery icon when finished.

## 3.3 Memory Card

You can use removable memory card with your phone to store information.

**Caution:** Don't bend or scratch your memory card. Keep it away from static electricity, water, and dirt.

Insert the memory card into the tray as shown below:

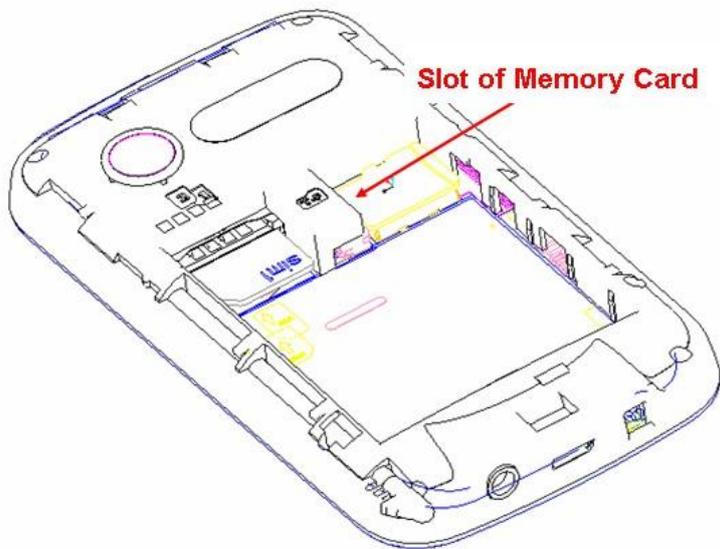

### 3.4 Turn it on/off

**Caution:** On power up, this phone may prompt you to enter your SIM card PIN code to unlock the SIM card. If your phone shows Input PUK code then means your SIM card is locked, please contact your web service provider.

To turn on your phone, press and hold the power on/off key for two seconds. If prompted, enter your four-to-eight-digit SIM card PIN code and/or four-digit unlock code.

If you do not insert a SIM card, your phone shows **Insert SIM**. None of the functions related to SIM card can be used and you can make an emergency call only.

To turn off your phone, press and hold the power on/off key for two seconds.

### 3.5 Make a call

Click the icon of dialing in idle, and press the number you want to dial. Whether call through SIM card 1 or card 2 depends on your need. After making a call, select **Options**→ **End Single Call** or press the end call key/power off key for ending the call.

### 3.6 Answer or Reject a call

When there is an incoming call, the phone rings and vibrates showing the number or the corresponding name.

The phone provides three modes as followings:

**Set-key Answering:** Press dial key or enter **Options** for answering a call. If you don't want to answer the call, please press the power on/off key.

**Any-key Answering:** Enter **User Profiles** → **Profile Options** → **Answer Mode**, tick **Any Key** for answering a call in the mode of any key.

**Earphone/Bluetooth mode:** when plugging the earphone (including blue-tooth earphone), you can answer a call by pressing the key on the earphone. If you are not convenient to press the key, please turn on the auto-answer mode (only in earphone mode) and make sure your earphone is plugged. Then your phone auto answers the call 5 seconds after ringing or vibrating.

### 3.7 Operations in a Call

Press **Options** to perform following operation during a call:

<b>Hold Single Line:</b>	Hold this call
<b>End Single Line:</b>	Hang up and end current call
<b>New Call*:</b>	Enter a new dialing display to make a new call
<b>Phonebook:</b>	Enter the phone book
<b>Messaging:</b>	Enter messages
<b>Sound Recorder:</b>	Recording the calling contents
<b>Mute:</b>	Set mute on or off. When setting mute on, your voice can not be heard through the line.
<b>Swap*:</b>	Switch between the current call and the holding call.
<b>Conference*:</b>	You can add additional parties to a call.
<b>DTMF:</b>	Set dual-tone multi-frequency (DTMF) on or off.

**Note:** the menus marked with \* must be supported by your SIM card. Please contact your service provider for details. Only when two or more calls are on can **Swap** and **Conference** show.

### 3.8 Insert International Access Code

When you are dialing an international call, keep press **star key** \* till the international call prefix “+” shows and then enter the number in the following order:

+ Country code → complete number → dial key

### 3.9 Dial an Extension or Voicemail Number

Please enter **P (pause)** or **W (wait)** when dialing an extension number, press **star key \*** to switch between “**P**” and “**W**”. Enter numbers according to the following order:

District code→ exchange phone number→ P or W→ extension number→ dial key

### 3.10 Emergency Calls

You can make emergency calls as long as your current location is network-covered. You can know by checking the signal strength bar showing on the top left corner of the screen.

**Note:** Emergency numbers varies by country. The emergency number(s) in your phone may not work in all locations, and sometimes an emergency call cannot be made due to network, environmental, or interference influences.

## 4. Basic

### 4.1 Display

The idle shows when you turn your phone on:

#### Icon area

Signal Strength	
	The vertical bars show the network connection strength: SIM 1 has signal; SIM 2 is unused or no signal; SIM 1 is unused or no signal; SIM 2 has signal.
	If you do not insert one SIM card, then you will have the unused SIM card shown as disable icon. SIM 1 has been inserted while SIM 2 not; SIM 2 has been inserted while SIM 1 not.
	Enter <b>Settings</b> and set the mode of single SIM, you will have the unused SIM card shown as disabled icon. SIM 1 and SIM 2 are both open. SIM 1 is unused; SIM 2 is unused.

 	<p><b>New SMS</b></p> <p>This icon shows when you receive a new message.</p> <p>SIM Card 1 has an unread message; SIM Card 2 has an unread message.</p> <p><b>Full Inbox</b></p> <p>This icon flickers when the inbox is full and you need to delete old messages for receiving new messages.</p>
 	<p><b>New MMS</b></p> <p>This icon shows when you receive a new message.</p> <p>SIM Card 1 has an unread MMS; SIM Card 2 has an unread MMS.</p>
	<p><b>Turn on Alarm Clock</b></p> <p>This icon shows when the alarm is on.</p>
	<p><b>Earphone</b></p> <p>This icon shows after plugging the earphone in. Voice will be heard from the earphone.</p>
	<p><b>Ring Mode</b></p> <p>Your current ring mode:</p> <p>Ring</p> <p>Vibration only</p> <p>Vibrate and ring</p> <p>Vibrate then ring</p> <p>Silent</p>
 	<p><b>Missed calls</b></p> <p>This icon shows when you are viewing the missed call.</p> <p>SIM Card 1 has a missed call; SIM Card 2 has a missed call.</p>
 	<p><b>Call Transfer</b></p> <p>This icon shows when you transfer all calls.</p> <p>SIM Card 1 has set up all call transfer; SIM Card 2 has set up all call transfer.</p>
	<p><b>Keypad Lock</b></p> <p>Different icons show different status of your keypad.</p> <p>Keypad unlocked ----currently the keypad is at unlocked status.</p>

	Keypad locked --- currently the keypad is at locked status, thus no operation can be made.
	<p><b>GPRS</b></p> <p>The icon shows when your SIM card has been connected to GPRS. SIM Card 1 has been connected to GPRS; SIM Card 2 has been connected to GPRS.</p>
	<p><b>Roaming</b></p> <p>This icon shows when your phone is at roaming status. SIM Card 1 is roaming; SIM Card 2 is roaming.</p>
	<p><b>Bluetooth</b></p> <p>This icon shows when the Bluetooth is active.</p>
	<p><b>Stopwatch</b></p> <p>This icon shows when stopwatch is being used.</p>
	<p><b>Battery Capacity</b></p> <p>This icon's color shows the status of battery capacity.</p>

**Text Area**

Name of Service Provider	Statuses of two SIM cards are shown on the screen, including the name of service provider for the card currently-used. If there is one SIM card not being used, then its symbol will be shown crossed on the top of screen. If there are two SIM cards not being used, you will have <b>Emergency Call</b> shown he screen for getting access to emergency call only.
Owner Number	Shows SIM 1 owner number

**Shortcut Icons**

There are icons of shortcuts shown in the bottom and left side of the screen. Enter the first shortcut icon at the bottom, you will have **File Manager, Phonebook, Funs & Games, Call Center, Messaging, Multimedia, Organizer, Settings, User Profiles, Extra, Services, Shortcuts**, etc. You can also enter **Options** of **Shortcuts** to **Add** or **Delete All** for hiding or showing shortcut icons.

## 4.4 Keypad Lock

Press Power-off key → Confirmation Key for locking the phone. There will be a icon of keypad shown on the top of the screen. The same procedure can be used for unlocking phone.

## 4.5 Password

The password of your phone is originally set to be **0000**. You can change it whenever you like. Your SIM card password or barred dial password can be also changed. Please contact your service provider for the details.

**Note:** Please contact your service provider for details.

## 5. Functions

---

MB-D5330 offers you a series of functions shown below:

### 1 File Manager

### 2 Phonebook

- 2-1 Add New Contact
- 2-2 View Contact
- 2-3 Options
  - 2-3-1 Call
  - 2-2-2 IP Dial
  - 2-2-3 View
  - 2-3-4 Send Text Message
  - 2-3-5 Send Multimedia Message
  - 2-3-6 Edit
  - 2-3-7 Delete
  - 2-3-8 Copy
  - 2-3-9 Move
  - 2-3-10 Send Contact
  - 2-3-11 Add to Blacklist
  - 2-3-12 Mark Several
  - 2-3-13 Caller Groups
  - 2-3-14 Phonebook Settings

### 3 Funs & Games

- 3-1 Java
- 3-2 Java Settings
- 3-3 Java Default Security
- 3-4 Games

### 4 Call Center

- 4-1 Call History
  - 4-1-1 SIM 1 History
  - 4-1-2 SIM 2 History
- 4-2 Call Settings
  - 4-2-1 SIM 1 Call Settings
  - 4-2-2 SIM 2 Call Settings
  - 4-2-3 Advanced Settings

## **5 Messaging**

- 5-1 Write Message
- 5-2 Inbox
- 5-3 Drafts
- 5-4 Outbox
- 5-5 MMS
- 5-6 Email
- 5-7 Broadcast Message
- 5-8 Templates
- 5-9 SMS Settings

## **6 Multimedia**

- 6-1 Camera
- 6-2 Image Viewer
- 6-3 Video Recorder
- 6-4 Media Player
- 6-5 Sound Recorder
- 6-6 FM Radio

## **7 Organizer**

- 7-1 Calendar
- 7-2 Tasks
- 7-3 Alarm
- 7-4 World Clock

## **8 Settings**

- 8-1 Dual SIM Settings
- 8-2 Pen Calibration
- 8-3 Phone Settings
- 8-4 Network Settings
- 8-5 Security Settings
- 8-6 Connectivity
- 8-7 Restore Factory Settings
- 8-8 Sound Effect

## **9 User Profiles**

- 9-1 General
- 9-2 Meeting
- 9-3 Outdoor
- 9-4 Indoor
- 9-5 Headset
- 9-6 Bluetooth

## **10 Extra**

- 10-1 Calculator
- 10-2 Stopwatch
- 10-3 Ebook Reader

**11 Service**

- 11-1 STK
- 11-2 Internet Service
  - 11-2-1 Homepage
  - 11-2-2 Bookmarks
  - 11-2-3 Recent Pages
  - 11-2-4 Input Address
  - 11-2-5 Service Inbox
  - 11-2-6 Settings

**12 Shortcuts**

- 12-1 Add New Contact
- 12-2 Search Contact
- 12-3 SIM1 Owner Number
- 12-4 Tone Settings
- 12-5 Volume
- 12-6 Alarm
- 12-7 Pen Calibration

**Note:** Contents of STK are subject to different service providers. When two SIM cards are used at the same time, two STK menus may both be shown according to the type of SIM card.

## 6. File Manager

---

Choose **File manager** and enter different storages such as **Phone** and **Memory Card**.

✧ Storage devices: press **Options** to perform following operations

<b>Open</b>	List all the folders and files
<b>Format</b>	Format the storage devices, the operation will delete all the data stored in the storage devices
<b>Rename</b>	Rename current storage.
<b>Details</b>	Shows the date and size of the file.

✧ Folders: press **Options** to perform following operations

<b>Open</b>	List all files in this folder
<b>New Folder</b>	Create a new folder and edit its name
<b>Rename</b>	Change the folder's name
<b>Delete</b>	Delete the folder
<b>Sort by</b>	Arrange the orders of files by <b>Name, Type, Time, Size</b> or <b>None</b> .

✧ As for Files: press **Options** to perform following operations

<b>Play</b>	Play multimedia file in this menu.
<b>Send</b>	Send the file as multimedia message, as Email, and you can also send via blue tooth.
<b>Use as</b>	Use as user profiles.
<b>New Folder</b>	Create new folder
<b>Rename</b>	Edit the file's name
<b>Delete</b>	Delete this file
<b>Sort by</b>	Arrange the orders of files by <b>Name, Type, Time, Size</b> or <b>None</b> .
<b>Mark Several</b>	You can <b>Unmark, Unmark All, Delete Marked, Copy Marked, Move Marked</b> and <b>Send Marked Via Bluetooth</b> .
<b>Copy</b>	Copy this file to any other folder in the same storage.
<b>Move</b>	Move this file to any other folder in the same storage.
<b>Delete All Files</b>	Delete all file in the same storage.
<b>Details</b>	Shows the date and size of the file.

**Note:** The options may differ depending on the object types.

## 7. Phonebook

---

Select **Phonebook** from the main menu for entering the phone book.

The phone book consists of phone storage and SIM card storage for you to use.

Select **Add New Contact**, and enter **Options** for the following operations:

**Select:**

**To SIM 1/To SIM 2:** You can add a **Name** and one **Number** in SIM card storage. The capacity depends on your SIM card type. For details, please contact your service provider.

**To Phone:** You can edit **Name, Number, Home Number, Company Name, Email Address, Office Number, Fax Number, Caller Picture, Caller Ring Tone, Caller Group**.

**Mark Several:**

You can select several numbers stored in your phonebook for the operations such as **Unmark, Send Text Message, Delete Marked, Mark All, Unmark All**.

**Caller Groups:**

This phone provides you **Friends, Family, VIP, Business** and **Others**.

**Phonebook Settings:**

This phone provides you **Speed Dial, My Number, VCard Version, Extra Numbers, Memory Status, Copy Contacts, Move Contacts, Delete All Contacts.**

Select any contact number, enter **Options** for the following operations:

<b>Call</b>	Call Current number
<b>IP Dial</b>	IP dial current contact person
<b>View</b>	View current contact information
<b>Send Text Message</b>	Send text message to current contact number
<b>Send Multimedia Information</b>	Send Multimedia Information to current contact number
<b>Edit</b>	Edit current contact information
<b>Delete</b>	Delete current contact information
<b>Copy</b>	Copy current contact information <b>To Phone, To SIM 1, To SIM 2</b> or <b>To File.</b>
<b>Move</b>	Move current contact information <b>From SIM 1 to Phone</b> or <b>From SIM 1 to SIM 2</b> ; Move current contact information <b>From SIM 2 to Phone</b> or <b>From SIM 2 to SIM 1.</b>
<b>Send Contact</b>	You can send Contact <b>As Text Message, As Multimedia Message, As Email, Via Bluetooth.</b>
<b>Add to Blacklist</b>	You can add the current number to blacklist according to your need.
<b>Mark Several</b>	You can select several numbers stored in your phonebook for the operations such as <b>Unmark, Send Text Message, Delete Marked, Mark All, Unmark All.</b>
<b>Caller Groups</b>	This phone provides you <b>Friends, Family, VIP, Business</b> and <b>Others.</b>
<b>Phonebook Settings</b>	This phone provides you <b>Speed Dial, My Number, VCard Version, Extra Numbers, Memory Status, Copy Contacts, Move Contacts, Delete All Contacts.</b>

---

## 8. Fun & Games

### 8.1 Java

You can download Java program and save here. Click **Options**, then you have **Launch**,

**Settings, Details, Delete, Network Profile and Restore Default in Java.**

## 8.2 Java Settings

You can make settings in **Java Audio, Java Backlight, Java Vibration, Select SIM, Java SIM1 Profile, Java SIM2 Profile, Heap Size.**

## 8.3 Java Default Security

You can make settings in **Third Party, Un-trusted Domain, Restore Default and Domain Options.**

## 8.4 Games

You can play games here. And there is a **Game Settings** for you to set up **BGM, Sound Effect, Vibration and Volume.**

# 9. Call Center

---

Enter the main menu **Call Center**, You can get access to **Call History** and **Call Settings.**

## 9.1 Call History

After entering the menu, select **SIM 1 Call History** or **SIM 2 Call History**, relevant details will be listed. Your phone keeps lists of missed calls, dialed calls and received calls. Calls are listed in the order from new to old.

**Note:** The phone keeps the only latest call of the same number.

1. Find the lists of **Dialed Calls, Received Calls, Missed Calls**
2. Press Confirmation key to view the details such as date and time.
3. press **Options** to perform following operation:

<b>View</b>	View the details of missed calls/ received calls and missed calls.
<b>Call</b>	Call the current number
<b>Send Text Message</b>	Send text message to current number
<b>Send Multimedia Message</b>	Send multimedia message to current number
<b>Save to Phonebook</b>	Save current number to phonebook
<b>Add to Blacklist</b>	Add current number to blacklist
<b>Edit Before Call</b>	Edit current number before call

**Delete**

Delete current call record

### **Delete Call Log**

You can delete the all the records of the missed calls, dialed calls and answered calls, you can also choose Delete All to delete all the three records.

### **Call Timer**

You can check the call time record of the phone up to now through this menu.

<b>Last Call</b>	Show the last call time
<b>Dialed Calls</b>	Show the dialed calls time
<b>Received Calls</b>	Show the answered calls time
<b>Reset All</b>	Reset the last call time, total inbound time and outbound time

### **Call Cost**

You can check the call charge of the phone up to now through the menu.

<b>Last Call Cost</b>	Check the last time call cost.
<b>Total Cost</b>	Check all the calls' cost.
<b>Reset Cost</b>	Input the PIN2 code, and then can cleanup all the cost.
<b>Max Cost</b>	Show the limitation of the currently cost, "0" means no limit.
<b>Price per Unit</b>	Press <b>setting</b> to setup the unit time rates.

**Note:** The call cost function must be supported by the network service provider. You need to input the PIN2 code to reset the cost, setup the maximum cost and rates. Please contact your network provider for the password.

### **Text Message Counter**

You can check the number of the sent and received SMS currently. Press **Reset** to clear the selected records.

### **GPRS Counter**

You can check the transmission flow when use the **GPRS Counter**, including checking the data flow of **Last Sent**, **Last Received**, **All Sent** and **All Received**. You can also reset the records through **Reset Counter**.

## 9.2 Call Settings

You can perform following operations through this menu. You should select call settings for SIM 1 or SIM 2 before entering the corresponding menu.

<b>Caller ID</b>	You can set caller ID by network, and you can hide or send ID here.
<b>Call Waiting</b>	Set the call waiting function.
<b>Call Divert</b>	Set the call divert function.
<b>Call Barring</b>	Set the call barring function.
<b>Line Switching</b>	There are 2 lines available. You can witch to your current line.

### Advanced Settings

#### Blacklist

There are 20 blacklist numbers can be set in the menu. When this function is active, the incoming calls in the blacklist will be shielded automatically.

You can enter **Mode** to switch on/off blacklist function.

And enter **Blacklist Numbers** for setting the number in the black list.

#### Auto Redial

When you make this function on, then the number you called will be redialed automatically if not being answered.

#### IP Dial

This phone enables you to set 3 groups of IP numbers. After activating one group of IP numbers, you may select IP dialing. Then the phone will compose IP dialing automatically in front of the number you want to dial.

You can enter **Activate SIM1 Call** for activating and the current number will become IP number of SIM Card 1. You can also enter **Activate SIM2 Call** to activate SIM 2 number and make it become IP number. **Edit** function is for editing current IP number.

<b>Call Time Display</b>	Turn on/off the display function for call
<b>Call Time Reminder</b>	Remind user for the call time. This function can be turned off and be set as once reminder or circular reminder.
<b>Auto Quick End</b>	After activating this function, calls will be hung up automatically

## 10. Messaging

---

You can receive and send messages, MMS, Multimedia Information, include pictures, music and text. You can also use broadcast messages and voice mail box based on web service. Please contact the provider for the web service.

Instant message make it possible for you to exchange messages with other wireless phone users. Enter main menu from the idle interface and select **Messaging** for your operation.

### 10.1 Write Message

You can write a new text message and insert template in your message. Press **Options** and you will have the following information:

<b>Send to</b>	Send the message to the phone number you need. You can enter number or add from phonebook.
<b>Input Method</b>	There are 12 kinds of input method for you to select.
<b>Insert Template</b>	There are 10 templates for you to select.
<b>Advanced</b>	You can insert number, name and bookmark in your message.
<b>Save to Drafts</b>	You can save the current message to drafts.

After entering a number or adding from phonebook, you will have the following options:

<b>Send</b>	You can send messages after writing.
<b>Edit Recipient</b>	You can edit the recipient here.
<b>Remove Recipient</b>	You can remove the recipient here.
<b>Remove All Recipients</b>	You can remove all recipients here.
<b>Save to Drafts</b>	You can save the current message to <b>Drafts</b> .

### 10.2 Inbox

Inbox is for storing received messages. When you receive a new message, your screen will show the icon of new message. Your phone vibrates or rings according to your selected mode. The icon of new message shows on the top of the status bar till you read the new message.

Select **SIM 1 Inbox** or **SIM 2 Inbox** for performing the following operations:

<b>Reply</b>	Reply a message to the current sender
--------------	---------------------------------------

<b>Call Sender</b>	Call senders of current message
<b>Forward</b>	Forward this message to others
<b>Delete</b>	Delete this message
<b>Delete All</b>	Delete all messages in the inbox
<b>Mark Several</b>	You can <b>delete</b> messages, <b>copy to phone</b> , <b>move to phone</b> , <b>unmark</b> , <b>Mark all</b> or <b>unmark all</b> messages.
<b>Advanced</b>	You can <b>use number</b> , <b>URL</b> , <b>Email</b> , <b>copy to phone</b> , <b>move to phone</b> , <b>copy all</b> and <b>move all</b> .

**Note:** Message icons keep flickering when you inbox is full in idle interface. Please delete some messages for ensuring you to receive new messages.

### 10.3 Drafts

Select **SIM 1 Drafts** or **SIM 2 Drafts** to view the draft messages you stored. And you can perform the following operations:

<b>Send</b>	Send a message to the sender
<b>Edit</b>	Edit current message
<b>Delete</b>	Delete current message
<b>Delete All</b>	Delete all the messages in the <b>Drafts</b>
<b>Mark Several</b>	You can <b>delete</b> messages, <b>copy to phone</b> , <b>move to phone</b> , <b>unmark</b> , <b>Mark all</b> or <b>unmark all</b> messages.
<b>Advanced</b>	You can <b>use number</b> , <b>URL</b> , <b>Email</b> , <b>copy to phone</b> , <b>move to phone</b> , <b>copy all</b> and <b>move all</b> .

### 10.4 Outbox

Select **SIM 1 Outbox** or **SIM 2 Outbox** to view the outbox messages you stored. And you can perform the following operations:

<b>Resend</b>	Resend current message to others.
<b>Edit</b>	Edit Current message.
<b>Delete</b>	Delete this message
<b>Delete All</b>	Delete all messages in the inbox
<b>Mark Several</b>	You can <b>delete</b> messages, <b>copy to phone</b> , <b>move to phone</b> , <b>unmark</b> , <b>Mark all</b> or <b>unmark all</b> messages.
<b>Advanced</b>	You can <b>use number</b> , <b>URL</b> , <b>Email</b> , <b>copy to phone</b> , <b>move to phone</b> , <b>copy all</b> and <b>move all</b> .

## 10.5 MMS

### Write Message

Edit the information for **TO**, **CC**, and **BCC**,

<b>Add Number</b>	Add telephone number of MMS recipient
<b>Add Email</b>	Add Email address of MMS recipient
<b>Edit</b>	Edit current selected recipient
<b>Delete</b>	Delete current telephone number from recipient list

Edit **subject** and click **Options**:

<b>Done</b>	Confirm the current finished contents
<b>Cancel</b>	Exit from the current unsaved contents
<b>Input Method</b>	Select the input method you want

Edit **Content** and click **Options**:

<b>Done</b>	Confirm the current finished contents
<b>Input Method</b>	Select the input method you want
<b>Add Picture</b>	Add picture in current MMS
<b>Add Audio</b>	Add audio file in current MMS
<b>Add Attachment</b>	Add attachment in current MMS
<b>Add Slide Before</b>	Add slide before current page of MMS
<b>Add Slide After</b>	Add slide after current page of MMS
<b>Add bookmark Text</b>	Add URL link in you MMS
<b>Preview</b>	Preview the contents of current MMS
<b>Slide Time</b>	Adjusting the slide time between current and next page of MMS

Click **Done** and perform the following operations:

<b>Send only</b>	Send current MMS
<b>Save and Send</b>	Save and sent current MMS
<b>Save to Draft</b>	Save current MMS to <b>Draft</b>
<b>Send Options</b>	You can adjust the contents of <b>Validity Period</b> , <b>Delivery Report</b> , <b>Read Report</b> and <b>Priority</b> .
<b>Exit</b>	Withdraw the editing interface and do not save the message.

### Inbox

Inbox is for storing received MMS. When you receive a new message, your screen will show

the icon of new message. Your phone vibrates or rings according to your selected mode. The icon of new message shows on the top of the status bar till you read the new message.

As the MMS inside inbox, you can operate the following operations:

<b>View</b>	View the current MMS
<b>Reply</b>	Reply the sender
<b>Reply by SMS</b>	Edit SMS and reply the sender
<b>Reply All</b>	Edit MMS and reply all the senders
<b>Forward</b>	Forward current MMS to the others
<b>Delete</b>	Delete the MMS
<b>Delete All</b>	Delete all MMS in the inbox
<b>Properties</b>	Check the details of the template
<b>Use Details</b>	Extract the number or hyperlink from the message, and you can <b>Send Multimedia Message, call or Save to Phonebook.</b>

## Outbox

Enter outbox to view MMS and you can perform following operations:

<b>View</b>	View current MMS
<b>Forward</b>	Forward current MMS to the others
<b>Edit</b>	Modify the current MMS
<b>Delete</b>	Delete the MMS
<b>Delete All</b>	Delete all the MMS in the outbox
<b>Properties</b>	Check the details of template
<b>Use Details</b>	Extract the number or hyperlink from the message, and you can <b>Send Multimedia Message, call or Save to Phonebook.</b>

## Drafts

You can perform following operations to the MMS stored:

<b>View</b>	View current MMS
<b>Send</b>	Send the MMS.
<b>Edit</b>	Edit current MMS.
<b>Delete</b>	Delete the MMS.
<b>Delete All</b>	Delete all the MMS in the drafts.
<b>Properties</b>	Check the details of the template.
<b>Use Details</b>	Extract the number or hyperlink from the message, and you can <b>Send Multimedia Message, call or Save to Phonebook.</b>

## Templates

There are 5 MMS templates provided for you. You can enter: **View**, **Write Message** and **Properties** for your different needs.

## MMS Settings

Enter MMS Settings, you will have:

<b>Profiles</b>	Select the name of service provider, or <b>Add new</b> .
<b>Common Settings</b>	You can <b>Compose</b> , <b>Send</b> , <b>Retrieve</b> , <b>Filter</b> , <b>Memory Status</b> .

Following are the details for **Common Settings**:

<b>Compose</b>	Include <b>Creation Mode</b> , <b>Picture Resizing</b> , <b>Best Page Time</b> , <b>Auto Signature</b> , <b>Signature</b> , etc.
<b>Send</b>	Include <b>Validity Period</b> , <b>Delivery Report</b> , <b>Read Report</b> , <b>Priority</b> , <b>Slide Time</b> , etc.
<b>Retrieve</b>	Include <b>Home Network</b> , <b>Roaming</b> , <b>Read Report</b> , <b>Delivery Report</b> , etc.
<b>Filter</b>	Include <b>Anonymous</b> and <b>Advertisement</b> .
<b>Memory Status</b>	View the storage of the MMS.

**Note:** If your MMS can not be sent successfully, please reset the corresponding settings of MMS. The route is: **MMS Settings**→ **Profiles**→ Please select the name of your SIM service provider→ **Options**→ **Activate**.

## 10.6 Email

After inserting a storage card, you can get the following information from Email:

<b>Send and Receive</b>	Send and receive email
<b>Write Email</b>	Write new email
<b>Inbox</b>	You can store received emails in your <b>Inbox</b>
<b>Outbox</b>	You can store sent emails in your <b>Outbox</b>
<b>Sent</b>	Send emails
<b>Drafts</b>	Store drafts
<b>Clear Mailbox</b>	You can store
<b>Delete Marked Emails</b>	Mark emails and you can delete them.
<b>Email Accounts</b>	Create new email accounts here
<b>Templates</b>	There are 10 templates provided for your email

**Note:** Before using functions in **Email**, you need to create new account first though **Email Accounts**.

## 10.7 Broadcast Message

Broadcast messages are sent from network operator to GSM phone users, such as weather forecast, traffic reports, stock market updates, etc. Every kind of mobile broadcast has a fixed model number. Mobile phone can automatically store broadcast message when you receive from a new channel. New broadcast message covers the old one if they are from the same channel.

After entering **Broadcast Message**, you need to select **SIM 1 Broadcast Message/ SIM 2 Broadcast Message** and perform the following operations:

<b>Receive Mode:</b>	Select the status of the broadcast message (on or off)
<b>Read Message:</b>	Read the broadcast messages
<b>Languages:</b>	Set the language of the broadcast messages
<b>Channel Settings:</b>	Set the broadcast messages channels

**Note:** This function must be supported by network. Please contact your network provider for more information.

## 10.8 Templates

There are 10 templates provided for you. You can enter: **Use**, **Edit** and **Remove** for your different needs.

## 10.9 SMS Settings

After entering **SMS Settings**, you need to select **SIM 1 Message Settings/ SIM 2 Message Settings** and perform the following operations:

<b>Profile Settings:</b>	There are four profiles for editing.
<b>Voicemail Server</b>	Create voicemail information, including <b>Name</b> and <b>Number</b> .
<b>Common Settings</b>	Tick <b>Delivery Report</b> , <b>Reply Path</b> , <b>Save Sent Message</b> for activate the functions.
<b>Memory Status:</b>	Check the capacity of messages storage
<b>Preferred Storage:</b>	Set the default message storage location, including storage in

phone and SIM card.

**Note:** you need support from the service provider to receive delivery reports.

## 11. Multimedia

---

Your phone offers multimedia applications and you can use **Multimedia** from main menu to open it.

### 11.1 Camera

Your phone has a high-Mega pixel camera for taking photos whenever and wherever you like. After taking photos, store them in the phone memory or memory card (if being inserted).

#### Camera Settings

Press **Options** in viewfinder display and make detailed settings:

<b>Photos</b>	View Pictures stored in the file.
<b>Camera Settings</b>	Select <b>LED Highlight</b> , <b>Shutter Sound</b> , <b>EV</b> , <b>Contrast</b> , <b>Anti-Flicker</b> , <b>Delay Timer</b> or <b>Cont. Shot</b> .
<b>Image Settings</b>	Adjust <b>Image Size</b> and <b>Image Quality</b> .
<b>White Balance</b>	Select <b>Auto</b> , <b>Daylight</b> , <b>Tungsten</b> , <b>Fluorescent</b> , <b>Cloudy</b> or <b>Incandescent</b> , etc.
<b>Scene Mode</b>	Select night or auto mode
<b>Effect Settings</b>	Select <b>Normal</b> , <b>Grayscale</b> , <b>Sepia</b> , <b>Sepia Green</b> , <b>Sepia Blue</b> or <b>Color Invert</b> .
<b>Flash</b>	Make flash on or off.
<b>Storage</b>	Select your preferred storage in <b>Phone</b> or <b>Memory Card</b> .
<b>Restore Default</b>	Use the default settings

#### Take a Photo

At camera viewfinder status, please take the scene which is shown in the picture frame, press **Confirmation key** for taking a photo.

After photo being taken, the phone saves automatically. You can select **Send** or **Delete** and then back to the viewfinder.

**Note:** All the photos are stored in the photos file.

## 11.2 Image Viewer

You can view the photos in this menu. All the photos related will be shown once you perform this function.

<b>View</b>	View the image files supported by the phone. If the file is not supported by the phone, then you will be prompted format error.
<b>Browse Style</b>	Select from <b>List Style</b> or <b>Matrix Style</b> .
<b>Send</b>	Send the file <b>As Multimedia Message</b> , <b>As Email</b> or <b>Via Blue tooth</b> .
<b>Use as</b>	Use as <b>Wallpaper</b> , <b>Screen Saver</b> , <b>Power on Display</b> , <b>Power off Display</b> or <b>Caller Picture</b> .
<b>Rename</b>	Edit the name of the file
<b>Delete</b>	Delete current file
<b>Sort by</b>	Arrange the orders of files by <b>Name</b> , <b>Type</b> , <b>Time</b> , <b>Size</b> or <b>None</b> .
<b>Delete All Files</b>	Delete all files in the image viewer.
<b>Storage</b>	Set the storage of reading file: <b>Memory Card</b> or <b>Phone</b> .

## 11.3 Video Recorder

Choose **Video Player**, the phone will be at video taking status. Press **Options** in viewfinder display and make detailed settings:

<b>Camcorder</b>	
<b>Settings</b>	Select <b>EV</b> , <b>Anti-Flicker</b> or <b>Night Mode</b> .
<b>Video Settings</b>	Select <b>Video Quality</b> , <b>Size Limit Reached</b> , <b>Time Limit Reached</b> or <b>Record Audio</b> on & off.
<b>White Balance</b>	Select <b>Auto</b> , <b>Daylight</b> , <b>Tungsten</b> , <b>Fluorescent</b> , <b>Cloudy</b> or <b>Incandescent</b> , etc.
<b>Effect Settings</b>	Select <b>Normal</b> , <b>Grayscale</b> , <b>Sepia</b> , <b>Sepia Green</b> , <b>Sepia Blue</b> or <b>Color Invert</b> .
<b>Storage</b>	Select your preferred storage in <b>Phone</b> or <b>Memory Card</b> .
<b>Restore Default</b>	Use the default settings

## Taking Video

Please press the **Confirmation** key for starting taking video. Press the key again, then video player pauses, please press **Stop** icon for stopping recording. You can save the file recorded by click **Yes** or **No**.

**Note:** Files recorded are stored in press the file-case named **video**.

## 11.4 Media Player

Select **Media Player** for checking movies stored in media player. Click **Options** for playing, sending, renaming, deleting, all deleting and sorting.

### Now Playing

Enter **Now Playing**,

Click  Play current songs or movie,

Click  and pause current playing,

Click  and pause playing,

Click  for previous songs,

Click  for next songs.

Click  for full screen play.

Adjust voice volume via **+** or **-**.

Click  for shifts from all repeat, single repeat or non-repeat.

Click  for selecting sequence playing or random playing.

Enter **Audio**, please click **Options** and enter the following settings:

<b>Current Play List</b>	Shows all files in the current play list.
<b>Settings</b>	Make settings for media player in <b>Player Settings</b> , <b>Audio Settings</b> or <b>Bluetooth Settings</b> .
<b>Details</b>	Select <b>File Name</b> , <b>Title</b> , <b>Artist</b> , <b>Album</b> , <b>Genre</b> , <b>Description</b> , <b>Year</b> , <b>Track Number</b> , <b>Duration</b> , <b>Size</b> , <b>Quality</b> , <b>Channel</b> or <b>Location</b> for viewing the corresponding details.
<b>Video Recorder</b>	Start using video recorder.

### My Play List

You can add and play your movie or songs in **My Play List**.

Enter **Video**, select **Open** → **Options**

<b>Play</b>	Play current move or song.
<b>Details</b>	Select <b>File Name</b> , <b>Title</b> , <b>Duration</b> , <b>Size</b> , <b>Quality</b> , <b>Channel</b> or <b>Location</b> for viewing the corresponding details.
<b>Add</b>	Add file from <b>Phone</b> or <b>Memory Card</b> .
<b>Remove</b>	Remove current file from the list.
<b>Send</b>	Send current file as multimedia message, email. And you can send via Bluetooth.
<b>Use as</b>	Use the current file in your user profiles.
<b>Move up /move down</b>	Adjust the order of video files in <b>My Playlist</b>

## 11.5 Sound Recorder

Enter **Sound Recorder**, click  for recording. Click  for pause the recording. Click **Continue** for continue recording. After the recording, click **Stop** for stopping the recording and enter the interface for saving. Press **Yes** to save the sound file. Press **No** to go back.

Click  for playing records in the list. Click  for entering previous record. Click  for entering next record.

Click **Options** and you can make the following operations:

### ✧ **New Record**

Begin to make a new record of sound.

### ✧ **Play**

Play the selected sound file.

### ✧ **Append**

For files in AMR format, you can add a new sound recording onto the original one and then save them.

**Tip:** **Append** is not available for files in other format.

### ✧ **Rename**

Change the name of the current sound file.

### ✧ **Delete**

Delete the current sound file.

✧ **List**

Enter the list of sound recorder.

✧ **Settings**

Set up Storage and File Format.

✧ **Delete All Files**

Delete all the sound files.

✧ **Use as**

Send the current sound file to user profiles.

✧ **Send**

Send the current sound file to user profile, MMS or Bluetooth.

## 11.6 FM Radio

Choose **FM Radio** and plug in earphone for turning on FM Radio.

Enter **Options** and you can make the following operations:

<b>Channel List</b>	There are 20 channels for you to store.
<b>Manual Input</b>	Inputs the FM frequency you prefer.
<b>Auto Search</b>	Makes auto search for channels available and add them into the channel list for you to select.
<b>Settings</b>	You can make settings for <b>Loud Speaker</b> , <b>Record Format</b> , <b>Audio Quality</b> and <b>Record Storage</b> .
<b>Record</b>	You can make record for current radio contents
<b>Append</b>	You can add radio record to your sound file and then save them.
<b>File List</b>	File list stores the radio records saved.

**Note:** Auto search needs some time, so please be patient.

### Basic Usage

The phone offers you the FM Radio background play function. Enter **Settings** and turn on background play. If you want to turn on the radio, please plug in earphone first before entering the interface of **FM Radio**. If you want to turn off the radio, unplug the earphone first and then

press **Back** in FM interface for exit.

**Tips:** When listen to the FM Radio, you can make or answer a call normally. While talking, the volume of the broadcast will into mute automatically.

## 12. Organizer

---

This phone has more organizers, such as calculator.

### 12.1 Calendar

The screen shows current date framed by special color box when entering **Calendar**. Press the 4-ways navigation key up, down, left or right to move to different date. Press Confirmation key or stylus to enter the corresponding menu. You can use the functions of **View**, **View All**, **Add T Event**, **Delete Event**, **Jump to Date** and **Go to Weekly View**.

### 12.2 Tasks

Enter **Tasks** and select **Add** for selecting **Date**, **Call** and **Anniversary** according to your different needs. Then edit time, subject, alarm time, repeat, location, priority, details, status, etc.

#### **View**

View the content of selected task

#### **Add**

Select Add to create a new task. You can edit its date, time, note, alarm mode and reminding mode etc.

#### **Edit**

Edit the content of selected task

#### **Delete**

Delete current **Tasks** contents

#### **Delete Overdue**

Delete overdue Tasks.

#### **Delete All**

Delete all the tasks

#### **Jump to Date**

Jump to specific date to view tasks.

#### **View Uncompleted**

#### **Send vCalendar**

Send vCalendar by SMS, Bluetooth or save as file.

#### **Save as File**

Save current tasks as file in phone or memory card.

**Note:** There is fixed space for storing tasks. If no **Add** shows in **Options**, please delete some tasks for saving spaces for more tasks.

## **12.3 Alarm**

The phone has an alarm clock with 5 separate alarms that you can set to alert you at the time(s) you specify. To set an alarm clock, select one alarm and edit its **on/off**, **Repeat**, **Alarm Tone**, **Snooze (mins)** and **Alert Type**.

## **12.4 World Clock**

Enter **World Clock**, check the information of time zone by the moving pole. Press left right key for entering **Option**. You can make on/off for **Daylight Saving Time for Foreign City**.

## **13 Settings**

---

You can set your favorite wallpaper, ring tone or some other functions via **Settings**.

## 13.1 Dual SIM Settings

This menu offer several usages of dual SIM cards for you to choose the mode you want.

<b>Dual SIM open</b>	Both dual SIM are standby
<b>Only SIM 1 open</b>	Only use SIM 1 standby
<b>Only SIM 2 open</b>	Only use SIM 2 standby
<b>Flight Mode</b>	The whole function related to calls are all closed at the status of flight mode.

## 13.2 Pen Calibration

Use the pen to tap the icon which is shown on the screen.

You will have prompts as followings:

**Click anywhere on the screen with your stylus to start calibration**

**Click on the top-left point**

**Click on the bottom-right point**

**Click on the center point**

**Done**

When you have **Done** shown on the screen, you have finished pen calibration.

## 13.3 Phone Settings

Enter **Settings** from main menu, select **Phone Settings** and then you can set the following items:

<b>Time and Date</b>	Set your current time zone, time, date and their display format.
<b>Schedule</b>	You can set up to 4 time points to automatically turn the phone on and off.
<b>Power On/Off</b>	
<b>Language</b>	Set the display language.
<b>Preferred</b>	
<b>Input Methods</b>	Select the preferred input method as you like.
	You can find submenus such as wallpaper, screen saver, power on display, and power off display, back light timer, show date and time, show owner number, show operator name in display characteristic.
<b>Display</b>	

<b>Dedicated Key</b>	You can set list of dedicated key according to your need.
<b>Auto Update of Date &amp; Time</b>	Switch on/off this function for auto update of date and time. After activation, the mobile will compare the phone time and network time when network for SIM is connected. If time and network are not synchronous, user will be prompted for time update.
<b>LCD Backlight</b>	Set the light time you need for the screen.

**Note:** Your choice of time zone does not influence the time and date. The setting of **Schedule Power On/Off** will not be activated if you set the same time for them.

## 13.4 Network Settings

Enter **Settings** from main menu, select **Network Settings**, you need to choose the SIM card network setup for SIM 1/SIM 2 and then you can perform following operations:

<b>Network Selection</b>	New search, Select Network, Selection Mode
<b>Preferences</b>	Set the preferred network during searching.

## 13.5 Security Settings

Enter **Settings** from main menu, select **Security Settings** and then you can perform following operation:

<b>SIM 1 security Settings</b>	You can set SIM lock (PIN code), fixed dial, barred dial and change password for SIM 1.
<b>SIM 2 security Settings</b>	You can set SIM lock (PIN code), fixed dial, barred dial and change password for SIM 2.
<b>Phone Lock</b>	Set a password for phone lock and the default password is <b>0000</b> .
<b>Auto Keypad Lock</b>	Set auto keypad locked on or off and the interval time for keypad lock.
<b>Change Password</b>	Change the phone lock password.

**Note:** As for the Password, please contact your service provider for details. Fixed Dial and Barred Dial must be supported by your SIM card. Please contact your service provider for detail.

## 13.6 Connectivity

### Bluetooth

The phone provides Bluetooth function. Enter **Bluetooth** and make operations as followings:

#### Power

Select to turn on/off the blue tooth device, you must turn on the Bluetooth Device of the phone before using it.

#### Visibility

You can turn on or off for **Visibility** for inquire the blue tooth device.

#### My Device

You can **Search New Device** via blue tooth. The menu will list all blue tooth devices that you inquired. You can select the device you need via the operations of **Transfer Files**, **Service List**, **Rename**, **Delete**, **Delete All**, etc.

#### Search Audio Device

Blue tooth device will be searched with your phone. And you can **Pair** them.

#### My Name

You can check the name, address, supported service of blue tooth device in the menu.

#### Advanced

Please make sure the blue tooth device is power on before inquiry. You can make operations in **Audio Path**, **Storage**, **Sharing Permission**, **Remote Control** and **My Address**.

### Data Account

There are names of GPRS service providers listed in **Data Account**. You can **Add**, **Edit** or **Delete** according to your needs.

## 13.7 Restore Factory Settings

Enter **Settings** from main menu, select **Restore Factory Settings** and restore initialized settings for wallpaper, screen saver, ring tone, etc. The code is "0000".

## 13.8 Sound Effects

You can have different sound effects through this menu, such as **Off** and **Equalizer**.

## 14. User profiles

---

Enter **Settings-- User profiles** from main menu and there are several profiles that you can edit the following contents as you like: **General**, **Meeting**, **Outdoor**, **Indoor**, **Headset** and **Bluetooth**. Once you connect your phone with an earphone or a blue tooth device, the **Headset** and **Bluetooth** are automatically activated and meanwhile the other profile is deactivated.

You can choose any profile as you like and customize the selected one:

- Tone Settings:** Set the incoming call tone, incoming message tone and keypad tone
- Volume:** Set the volume of ring tone and key tone
- Alert Type:** Set **Ring Only**, **Vib. Only**, **Vib. and Ring**, **Vib. then Ring**, **Silent**
- Ring Type:** Set Single, Repeat or Ascending
- Extra Tone:** Set warning ring and error ring on or off
- Answer Mode:** Set pressing any key to answer except power on/off key, right soft key and # pound key. Set auto answer on or off (only in Headset Mode).

## 15. Extra

---

### 15.1 Calculator

Enter **Calculator** menu, then you can make simple calculating.

## 15.2 Stop Watch

Choose **stopwatch**, there are **Typical Stopwatch** and **nWay Stopwatch** for different occasions and following are ways to use them.

**Typical Stopwatch**—there are two ways for your timing, that is **Split Timing** and **Lap Timing**. Enter **View Record** to check previous timing records.

**nWay Stopwatch**—press start you can time 4 courses by pressing the 4-way navigation key up, down, left and right.

## 15.2 Ebook Reader

This function is for you to enjoy reading though mobile phone. Please first enter **Global Settings** for making settings in **Font Size**, **Scroll by**, **Auto Scroll**, **Scroll Speed**, **Full Screen**, **Encoding**, **Alignment** and **Select Storage**.

## 16. Services

---

Enter from the menu of **Services**→ **Internet Service**, you can connect to the Internet or run web-based applications by using web browser. Please consult your service provider for linking to the network.

**Note:** Your phone is applicable to the GPRS (General Packet FM Radio Service) network link. Type of the network link depends on your network service provider. This function must be supported by network. For more information about this please contact your network provider.

### Home

Selecting the main menu, you can log on the homepage set up to browse. If you do not set up, you can use the website pre-set by the manufacturer.

### Bookmarks

Enter **Bookmark**, select the **Options** button, you can do the following operations to the bookmark selected:

- |              |  |
|--------------|--|
| <b>Go to</b> | Link the website appointed by the bookmark.                  |
| <b>Edit</b>  | Edit the name and address of the current bookmark.           |
| <b>Send</b>  | Send the address of the bookmark as text message, multimedia |

	message or Email.
<b>Delete</b>	Delete bookmarks.
<b>Delete All</b>	Delete all the information of bookmarks.
<b>Add Bookmark</b>	Add new name and address of the bookmark.

## Recent Pages

The menu lists the website records recently visited and facilitate your visit to the site.

## Input Address

Enter the menu, after inputting the URL address of the WAP service that you want to visit, select the **option** button and select complete. The phone automatically logs on the website you input.

## Service Inbox

You can check the web service message in this mailbox, and can also process delete etc.

## Settings

You can select **settings** menu, then set up the content relates to the WAP service as following:

<b>Select SIM</b>	Select use SIM card in the internet.
<b>Profile</b>	Select and start the network configuration file you need, can set up homepage, account and login password etc.
<b>Browser Options</b>	Waiting time of viewing the website and figures shown.
<b>Service Message Settings</b>	Turn on/off the recipition of the service news.
<b>Clear Cache</b>	Use to clear the records in the cache.
<b>Clear Cookies</b>	Use to clear personal writing data.

## Malfunctions & Measures

---

Here list some malfunctions that may occur and measures. If the measures can't solve the problem please contact authorized after service center. Thank you!

### Can't turn the phone on

- check battery installation, please install battery correctly
- check if battery level is low, change a battery or charge the battery
- Check if enter incorrect PIN code 3times in a row. If yes, the phone is locked, then you should enter PUK code( please contact your network provider for PUK code)

### SIM Card Void

When the phone shows "SIM Card Void", you can try the following:

- Powers the phone off then restart to sure if can solve.
- If your SIM card is a prepaid card, to sure whether the card is insufficient.
- Please turn to your network provider, and to sure whether to be refused registration network by other reasons.

### Weak signal or no signal

- You may be in a location where the reception is bad, such as tunnel or cellar, please relocate and try again.
- You can try turning around slightly or get near the window if you are in the room.

### Bad talking quality

- weak signal, you can try solutions above
- low battery, change a new battery or charge the battery
- use up volume key to adjust microphone volume

### Can't make a call

- check if you enter the correct number and press send key
- check if you set call barring, if yes cancel it

### Can't receive calls

- check if your phone is turned on
- check if screens shows no signal, if yes, try solutions above
- check if you set call barring, if yes, cancel it

**Screen is dark**

- check if battery is low, change a battery or charge the battery
- adjust the brightness in settings
- your phone may be affected with damp, keep it dry
- 

**When click on the screen and deviate**

- Need to adjust, please adjust in time.

**Tips:** if all suggests and solutions can't solve your problem, please contact authorized after service center. Please do not disassembly or repair your phone without professional guide. Thank you!

## Specific Absorption Rate Data

---

### **This model meets international guidelines for exposure to FM Radio waves.**

Your mobile device is a FM Radio transmitter and receiver. It is designed not to exceed the limits for exposure to FM Radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The ICNIRP SAR limit for mobiles devices used by the general public is 2 W/kg.

As SAR is measured utilizing the device's highest transmitting power, the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum level required to reach the network.

New phones must meet the international guidelines before coming into the market. The highest SAR value for this device when tested at the ear was 0.85 W/kg and the highest tested SAR value is 0.44 W/kg.

### **Information from the World Health Organization**

The World Health Organization has stated that present scientific information does not indicate the need for any special precautions for the use of SAR Data mobile devices. They note that if you want to reduce your exposure then you can do so by limiting the length of calls or using a "hands-free" device to keep the mobile phone away from the head and body. Improvement of this device may cause a little change of the SAR data. However, the device is designed in accordance with the guidelines in any case.

## Battery Tips

---

- The machine is provided by the reusable rechargeable battery.
- The new battery only can by two or three times full charge and discharge cycle to achieve optimum performance.
- Battery can be recharged many times for repeated use, but it will eventually be exhausted. When the talk and standby time is significantly shorter than usual, then need to replace a new battery.
- Use the battery the handset manufacturers approved only, and use the authorized charger for the battery charge only.
- Cut off the power supply when do not use the charger.
- Do not connect a battery to a charger more than one week, the long time charge will affect battery life.
- The battery storage for too long would affect the results. And the battery will automatically discharge as long time unused.
- Do not use a damaged battery or charger.
- Never expose batteries to temperatures below -10°C (14°F) or above 45°C (113°F).
- Always take your phone with you when you leave your vehicle.
- It is normal for batteries to gradually wear down and require longer charging times. If you notice a change in your battery life, it is probably time to purchase a new battery.
- Do not let the batteries short-circuit. When metal objects (such as: coins, etc.) directly connected to the battery anode and the cathode (with the metal side), will occur short-circuit accident. In the pocket or handbag carry a spare battery should be particularly careful. Short-circuit will damage the battery.
- Please deal with the waste batteries according to the relevant provisions.
- Never dispose of batteries in a fire because they may explode.

## Product Maintenance

---

Your phone is a product with outstanding design and superior quality, please take good care using it. You are strongly suggested to take the following advice which should help you stick to the warranty in order to extend the usage period of the product.

- Keep your phone and its parts away from children.
- Keep your phone dry. Keep it away from rain, damp or any kind of fluid.
- Don't touch your phone with wet hands when charging or there may be bodily injury or damage to the phone.
- Keep your phone away from extreme heat which can shorten your phone's life, damage the battery, twist or melt some plastic parts.
- Keep your phone away from extreme cold because when the temperature grows up, water vapor accumulated from inside the phone may damage the electronic circuit.
- Keep your phone away from dust and dirt.
- Keep your phone away from ignited cigarettes, fire or heat source.
- Don't disassemble your phone by yourself.
- Don't drop, beat or shake your phone. Any rude treatment can damage the inner electronic circuit board.
- Don't daub your phone because paint would jam-up the earpiece, microphone or any other removable part and disable your phone.
- Clean the pc camera or screen with neat, soft and dry cloth. Don't use alcohol or other cleaning solutions.
- If your phone, battery, charger or parts can't work, please take them to the authorized service center for help.