

December 2006

W950





Preface

Purpose of this document

This White paper will be published in several revisions as the phone is developed. Therefore, some of the headings and tables in this document contain limited information. Additional information and facts will be forthcoming in later revisions.

The aim of this White paper is to give the reader an understanding of the main functions and features of this phone.

People who can benefit from this document include:

- Operators
- · Service providers
- Software developers
- Support engineers
- Application developers

This White paper is published by:

Sony Ericsson Mobile Communications AB, SE-221 88 Lund, Sweden

Phone: +46 46 19 40 00 Fax: +46 46 19 41 00 www.SonyEricsson.com/

© Sony Ericsson Mobile Communications AB, 2006. All rights reserved. You are hereby granted a license to download and/or print a copy of this document

Any rights not expressly granted herein are reserved.

First edition (December 2006)

Publication number: EN/LZT 162 057 R1A

This document is published by Sony Ericsson Mobile Communications AB, without any warranty*. Improvements and changes to this text necessitated by typographical errors, inaccuracies of current information or improvements to programs and/or equipment, may be made by Sony Ericsson Mobile Communications AB at any time and without notice. Such changes will, however, be incorporated into new editions of this document. Printed versions are to be regarded as temporary reference copies only.

*All implied warranties, including without limitation the implied warranties of merchantability or fitness for a particular purpose, are excluded. In no event shall Sony Ericsson or its licensors be liable for incidental or consequential damages of any nature, including but not limited to lost profits or commercial loss, arising out of the use of the information in this document.

Sony Ericsson Developer World

On <u>www.SonyEricsson.com/developer</u>, developers will find documentation and tools such as phone White papers, Developer Guidelines for different technologies, SDKs and relevant APIs. The Web site also contains discussion forums monitored by the Sony Ericsson Developer Support team, an extensive Knowledge Base, Tips & Tricks, example code and news.

In addition, Sony Ericsson offers technical support services to professional developers. For more information about these professional services, visit the Sony Ericsson Developer World Web site.

Document history

Change history		
2006-12-11	Version R1A	First released version.

3

Contents

Product overviewProduct overview	_
Key features	
Controls and operation	
Miscellaneous	
Models	
Accessories	11
Manuals	11
Languages	11
Images	12
Duadicat communican	10
Product comparison	
OverviewAdded and removed features	
Hardware	
Software	
Comparison table	16
Technologies in detail	18
Multimedia	19
Walkman® player	19
FM Radio	19
Video player	20
PlayNow TM	20
Phone applications	20
Business telephony	
PIM applications	
Contacts	
Calendar	
Tasks	
Notes	
Time and alarm clock	
Sound recorder	
Calculator	
Stopwatch	
Converter	
Speed dial	
Messaging	
Email	
Push email	
Unified mailbox	
Area Information	_
Picture Gallery	
Picture Editor	
Entertainment	
MusicDJ™	
Games	
Browser	
Browser security	
RSS feeds	
Connectivity	30

Bluetooth™ wireless technology3	30
IrDA3	
USB3	32
Data storage3	32
User storage3	
Action at master reset	
Folder view of internal storage	
Synchronization and data transfer	
SyncML – an open standard for synchronization	
Remote synchronization	
Local synchronization	
Sony Ericsson PC suite	
DRM	
Personalization	
Background and application shortcuts	
Screen saver4	
Picture phone book4	
Ringtones4	
Themes and skins	
Over-The-Air (OTA) Configuration	
Sony Ericsson phone configurator4	
Locks4	
Keylock4	
Phone lock4	
SIM card lock4	
3G4	
Positioning4	
GPRS4	15
Symbian OS operating system4	15
Key features of Symbian OS v9.14	16
UIQ 3.04	ļ 7
Java [™] 4	1 7
W950 consumer package4	18
Accessories4	
Technical specifications5	50
SIM AT services supported6	34
User interaction with SIM AT6	36
Integrated browser technical data6	37
Security6	
·	
Abbreviations6	36
Related information7	
Documents	
Links7	
Trademarks and acknowledgements7	′5
Index 7	77

Product overview

The W950 is a slim, compact, stylish Walkman® phone built on the Symbian operating system. A 4 GB built-in memory, large touch screen and dedicated music keys support the music experience and positions the W950 as the top of the line Walkman® phone.

3G makes surfing the Web on the go a fast and satisfying experience. The Opera™ 8.0 Web browser in combination with the touchscreen makes the interactive mobile Internet pure pleasure.

For PC synchronization or transferring files between the phone and a computer, a USB cable is provided in the kit. W950 supports USB high-speed mode, allowing transfer of gigabytes of files in only minutes.

W950 uses multitasking to allow you to perform several actions at once, for example you can listen to music while browsing the Web, or work with PIM applications during a phone call.

6 December 2006

Key features

2.6-inch colour touchscreen

The large 2.6-inch (240x320 pixels) full graphic QVGA 262k colour touch-sensitive screen enhances viewing and navigation, facilitating high-quality multimedia and entertainment.

Walkman® player

The Walkman® player converts the phone to a portable eAAC+, AAC+, AAC, MP3 and WMA player. Dedicated hardware keys and a rich graphical interface that supports album arts and lets you pick an album with the tap on the screen, makes the W950 a state of the art portable music machine.

4 GB media memory

The W950 has a built-in 4 GB solid state flash memory that can hold up to 4000 songs in eAAC+ format or around 1000 songs in MP3 format. The media memory is accessible from a PC using USB High speed which permits a transfer of files at 480 Mbps. This means that a gigabyte of data can be transferred in only around three minutes.

Opera™ 8.0 Web browser

Opera™ 8.0 allows full HTML browsing and supports all de facto standards. It features normal or small screen rendering as well as full screen view.

FM Radio with RDS

The FM radio with RDS (radio data system) offers instant and easy access to FM radio channels. RDS information which is sent out by the currently tuned-in radio station, is displayed directly on the screen. Just plug in the handsfree that works as an antenna and start listening to your favourite station. The radio can also be started by the alarm clock.

Music recognition

A music clip is recorded from the FM radio or Sound recorder, and sent to the TrackID™ Internet service to get the song title, artist and album name, if available.

Gaming

Gaming is already a very popular feature in mobile phones, and with Advanced Java, users can add new games and skill levels to further enhance the entertainment value of Sony Ericsson phones. There are embedded games included in the phone at purchase.

UIQ 3.0 / Symbian 9.1 operating system

UIQ 3 is a media-rich, flexible and customizable software platform, pre-integrated and tested with Symbian OS v9. The Symbian OS makes it possible to add useful applications to the phone including navigation, travel and organizer enhancements.

$JAVA^{TM}$

Download extra content with Java[™], for example, new information and entertainment-based applications. This gives users a chance to personalize the functions and features in their phones, and developers the opportunity to create new applications.

7

Disc2Phone

Music management software on the CD which is included in the kit. Music files can be transferred from a computer to the phone. Search for and select music on your computer or audio CDs and convert the audio tracks to MP3 format.

PlavNow™ 3.0

PlayNow[™] is a direct-link download application. PlayNow[™] users can connect to a live list of top music hits, videos, games and pictures. Content can be previewed before purchasing.

Video player

The Video player supports MPEG4, 3GPP™, RealMedia and Windows Media Video 9. It is possible to play locally stored video clips as well as streaming content from the Internet.

Portable Handsfree with remote control

The Walkman® player and the FM radio can be controlled with the stereo portable handsfree remote controller. The remote controller has Play/Pause, Volume up/down, FF/next song or station and REW/previous song or station. Calls can be received while listening to music.

Bluetooth™ wireless technology

Several devices (simultaneous BluetoothTM connections) can be connected to W950 using Bluetooth wireless technology up to 10 metres away. For example, the phone can be answered with a Bluetooth headset when it rings and images can be sent to another phone at the same time. Several mobile phones can take part in a Bluetooth supported game and the phone and a computer can exchange data such as images, video clips, business e-cards, music files and calendar data. The W950 also supports real time transferring of stereo audio to, for example, a stereo Bluetooth headset.

Personal Information Management (PIM)

Stay up-to-date with everyday events by synchronizing phone contacts, calendar appointments and tasks in the phone with similar programs in a computer. The USB cable (which comes with the phone), the built-in infrared or the Bluetooth feature can be used together with the synchronization software available on the supplied CD. This software may also be downloaded from www.SonyEricsson.com/support.

8

Push email

The push email clients for the major operator solutions are supported in W950.

December 2006

Controls and operation





- A On/off button
- B Jog Dial
- C Back button
- D Walkman[®] player indicators (not shown)
- E Walkman[®] launch button
- F Connector for accessories and charger

- G Cancel button
- H 12 keys alphanumeric
- Volume control. Press and hold to skip to previous or next music track or radio station
- J Multimedia play/stop button


Walkman®

A press on the dedicated Walkman® button immediately opens the Walkman® player in play view. Navigation is easy and instinctive. When the Walkman® player is launched, symbols light up on the front, clearly showing how the top three keys of the keypad are used to play/stop and skip to previous or next track. A dedicated play/stop button and a combined volume key and previous/next button on the side of the phone makes it easy to operate the Walkman® player with the phone still in the pocket.

The combination of the large touch-sensitive screen and a graphically rich interface that includes album arts, makes browsing the music collection intuitive.

Standby view

The Standby view is displayed when W950 starts.



The Standby view acts as the starting point for tasks performed on the W950, it does this by linking to the feature rich applications of the phone.

The Standby view is highly customizable, just about every aspect of its appearance, content, navigation methods and behaviour can be changed.

Multitasking

It is possible to have several applications open on W950 at any time. An open application can either be closed using the Back key or simply left open.

Selecting Task manager displays a list of open applications. To return to an open application select it from the Task manager or the Main menu.

Editing features to move text from one application to another can be used.

Text input methods

There are four text entry methods:

- Keypad prediction keypad based predictive text input.
- Handwriting recognition using the stylus to write characters directly on the screen.
- On-screen keyboard a virtual keyboard that can be launched from the status bar.
- Multitap standard Multitap keypad input (only available when Handwriting recognition or the On-screen keyboard is active).

Keypad prediction

Keypad prediction allows words to be entered by a single press of a key to input any of the letters associated with that key. When using keypad based predictive text input, the primary word suggestion is presented where you are writing; additional suggestions are presented in a pre-edit box at the top of the screen.

Word suggestions and next word suggestions

Word suggestions and next word suggestions are optional text prediction functions that a user can enable or disable for all input modes, independently. As with keypad prediction, primary word suggestions and next word suggestions are presented where you are writing, with additional suggestions presented in a pre-edit box at the top of the screen.

For the input methods of Handwriting recognition, On-screen keyboard and Multitap, the functions of word suggestions and next word suggestions are complimentary. This means that when entering text via one of these methods, you have the option to select one of the suggested words displayed, or to ignore them and continue entering text normally.

Additionally, if you mistype or misspell a word using one of these input methods, when the word suggestions functionality is enabled the pre-edit box may also suggest closely matching words. These words would either be from one of your selected language dictionaries, from a word you have previously typed, or from items that you have added to your 'My words' personal dictionary.

Flight mode

UMTS, GSM or Bluetooth connection from a mobile phone may be harmful to the safe operation of an aircraft.

Flight mode is a special mode that disables all radio transmissions, but still allows the user to listen to music, use PIM applications and play games.

Miscellaneous

Models

Standard W950

- Europe, Middle East, Americas, Latin Asia
- Latin and Cyrillic keypad available
- Latin character handwriting recognition

W958

- Mainland China
- Chinese keypad available and Strokes input method
- Chinese character handwriting recognition

Accessories

W950 supports a large range of accessories. See "Accessories" on page 48.

Manuals

A User guide, Quick guide and a Web guide for W950 will be available at www.SonyEricsson.com/support. The Web guide offers more in-depth information on W950 functionality.

Languages

The languages for W950 will be available on the Internet for download at www.SonyEricsson.com/support.

Images









Product comparison

The Sony Ericsson W950 and M600 have important differences in both hardware and software.

The W950 is a Walkman[®] phone aimed at the music-loving Professional and Selective Pioneer – combining a sleek mobile phone with a serious music player.

M600 is a compact messaging phone, with an innovative dual function keyboard. M600's main focus is messaging with push email functionality.

13 December 2006

Overview

W950:



- Is a Walkman[®] phone built on the UIQ platform 3.0 and Symbian 9.1.
- Incorporates Walkman[®] player with album arts and graphic equalizer – providing a dedicated music user interface.
- · Is targeted at music-loving Selective Pioneers.
- Comes with a 4 GB built-in flash memory (holds up to 4000 songs).
- Has a built-in FM radio with RDS support.
- Has extended services, such as music recognition from the FM radio or Sound recorder. The user can obtain title, artist and album information about unknown songs.
- Supports USB 2.0 high-speed for fast transfer from PC.
- Supports OMA DRM phase 2.
- Supports streaming stereo audio over a Bluetooth connection.
- Comes with a stereo headset with remote control, and music management Disc2Phone software.

M600:



- Is a messaging phone built on the UIQ platform 3.0 and Symbian 9.1.
- Is a phone whose users can receive, handle and send email conveniently and efficiently.
- Is targeted at Rational and Selective Pioneers
- Has a unique dual function QWERTY keyboard.
 This concept allows users to switch between numeric and alphabetic input modes.
- Supports the push email clients for the major operator solutions.
- Is supplied with VPN software to ensure security
- Is supplied with a 64 MB Memory Stick Micro[™] (M2[™]).

Added and removed features

Hardware

Added to W950

- Flush 12-key alphanumeric keypad. Also, a Walkman® launch button and a C (Cancel) button
- Volume control and multimedia play/stop button
- Dedicated illuminated Walkman® player indicators on the keypad
- 4 GB internal memory
- USB High-speed support

In M600, but not W950

- Dual function keyboard
- Slot for memory card
- Personalizable Internet button

Software

Added to W950

- Walkman[®] player instead of Media player
- RDS FM radio
- Digital Rights Management (DRM) phase 2

In M600, but not W950

- CDC Java

Comparison table

	W950	M600	
Hardware			
Size (mm) and weight	106 x 54 x 15, 112g	107 x 54 x 15, 112g	
Colour	Mystic purple	Granite black, crystal white	
System	Dual mode UMTS 2100-GSM 900/ 1800/1900	Dual mode UMTS 2100-GSM 900/ 1800/1900	
Battery	BST-33	BST-33	
Talk time (hours)	GSM up to 7.5 hours UMTS up to 2.5 hours	GSM up to 7.5 hours UMTS up to 2.5 hours	
Stand-by time (hours)	GSM up to 340 hours UMTS up to 250 hours	GSM up to 340 hours UMTS up to 250 hours	
Music mode (hours)	10 hours		
Operating system	Symbian™ OS V9.1	Symbian™ OS V9.1	
MMI	UIQ 3.0	UIQ 3.0	
Display	2.6" 320 x 240 pixels QVGA, 262 k colour TFT touchscreen	2.6" 320 x 240 pixels QVGA, 262 k colour TFT touchscreen	
Jog Dial	3-way	3-way	
RAM memory	64 MB	64 MB	
Flash memory	128 MB	128 MB	
Application CPU	ARM9	ARM9	
User memory internal	60 MB + 4 GB	Up to 60 MB (without 3D games)	
User memory external	No	64 MB Memory Stick Micro™ (M2™)	
Keylock key	No	No	
Back key	Yes	Yes	
Play key	Yes	No	
Backlight in keyboard	Yes	Yes	
Connectivity	USB 2.0 high-speed (up to 480 Mbps) USB mass storage support USB charging support IrDA Bluetooth 2.0	USB 2.0 full speed (up to 12 Mbps) USB mass storage support USB charging support IrDA Bluetooth 2.0	
Software			
Music	Walkman [®] player.	Media player.	
Browser	Opera™ 8.0 browser that supports frames and JavaScript technology.	Opera [™] 8.0 browser that supports frames and JavaScript technology.	
Symbian	9.1	9.1	
UIQ	3.0	3.0	
Multitasking	Yes	Yes	

Audio formats	MP3, AAC, AAC+, eAAC+, AU, iMelody, AMR, RMF, DLS, Real Audio, G-MIDI level 1 with 40 voices polyphony, WAV, XMF and WMA (Windows® Media Audio).	MP3, AAC, AAC+, eAAC+, AU, iMelody, AMR, RMF, DLS, Real Audio, G-MIDI level 1 with 40voices polyphony, WAV, XMF.
Video formats	MP4 (MPEG4 and AAC-LC), 3GP (H.263 AMR NB and AAC), Real Audio Video and WMV 9 (Windows® Media Video).	MP4 (MPEG4 and AAC-LC), 3GP (H.263 AMR NB and AAC) and Real Audio Video.
Image editor	Yes	Yes
Packaging		
Memory card	emory card No I	
Pouch	Yes	
CDs	Yes PC Suite Try and Buy applications	Yes PC Suite

17 December 2006

Technologies in detail

This chapter offers a detailed description of the technologies available in this product.

18 December 2006

Multimedia

Walkman® player

The keypad and dedicated hardware buttons are used to start and stop playback, switch tracks and adjust volume. A remote control on the handsfree lets you use the Walkman® player without even taking the phone out of your pocket.

Songs may be collected in numerous ways, including Internet download and file transfer from PC.

The phone comes with the Disc2Phone PC software that supports the extracting of songs from CDs, compression and transfer to the phone. Thanks to the USB High-speed support, the transferring goes quickly. A gigabyte of files can be transferred in about three minutes.

Music can be further organized on the W950. Music is grouped by Album, with album art being displayed on the screen, by Artist or arranged in user created playlists.

The user can rate songs or assign moods to them. Based on these ratings and moods, automatic playlists can be generated, and different visual effects can be used to visualize moods.

The player also automatically generates playlists based on, for example, the most or least played songs.

The Walkman® player features an equalizer with predefined settings like Mega Bass™, Pop and Classical.

The Walkman® player is intelligently aware of other applications in W950. Playback is paused when a telephone call is made or received.

FM Radio

The FM radio works on the 87.5 to 108.0 MHz frequency band.

A handsfree headset or an accessory with an FMradio antenna must be attached to the phone for the FM-radio to work.

The FM radio with RDS offers instant and easy access to FM radio channels. The RDS function displays radio text information directly on the screen. This information is sent out by the radio station the user is currently tuned in to. The stereo handsfree or the phone's loudspeaker can be used to listen to the radio.

Using the FM radio it is possible to do the following:

- Record a short section of a song and automatically use the TrackID™ Internet service to identify it.
- The FM radio can be selected as the alarm signal allowing W950 to work as a clock radio.
- Display frequency, station name, RDS, radio text and signal strength if the information is available.
- · Automatic or manual station search.
- Enter required frequency manually.
- Save a station and customize its saved name.
- Automatically switch to stations when they are broadcasting news or traffic announcements.
- Mute the radio.
- Listen to the FM radio in the background while using another of the phone's applications.

Video player

The Video player allows users to view and manage video clips that are stored both remotely and locally. The Video player supports the common features that are available in PC video players (play, stop, reposition within the clip, next and previous media file), in addition to play back options such as default view option, repeat current clip and repeat all clips.

Video clips are played back with 30 frames per second, giving TV-like quality. It is possible to set bookmarks, so that watching can be resumed at a certain point in the movie later on.

Streaming

The video player plays streaming content from the Internet using RTSP (Real Time Streaming Protocol) session control according to the 3GPP™ specification.

PlayNow™

PlayNow™ is a unique direct-link quality music download application. PlayNow™ users can connect to a live list of top music hits, videos, games and pictures. Content can be previewed before purchasing.

The content available from PlayNow™ differs from country to country. Games cannot be previewed and are only available in certain phone modes.

Phone applications

- Ongoing call menu W950 has a dynamic ongoing call menu that changes to help the user perform actions quickly and simply.
- Accept Calls Users can specify which calls to accept and which calls to reject.
- Rich call functionality W950 allows SMS, MMS, and contact cards to be easily sent during a call.
- Call notes W950 can launch Notes when a call is ongoing. The note is automatically named with the other party's number, name (if known), time of call and date. The user can start writing in the note immediately.
- Follow up call W950 can automatically create follow up call tasks. The task contains the phone number, contact name, time of call, and date of call.
- Speakerphone.

Business telephony

Corporations have traditionally used fixed-line and DECT phones in the office, but now there is a strong trend towards the use of mobile phones to access business telephony features. Of prime importance, however, is that users can still access

the features and functionality of their corporate communication system, no matter which phone they are using. W950 can interact with the following corporate systems:

- A corporate PABX (Private Automatic Branch Exchange) switch, equipped with a mobile extension port (like the Ericsson MD110 and BusinessPhone).
- The mobile centrex service, if provided by the operator.
- A telephony server located at the operator's or customer's premises.

Feature buttons

The user activates corporate features by selecting commands from a list, which can be dynamically sent by the server via an IP link, or pre-configured by the company's IT manager, the operator or a service provider. Each command displays a text description of the function.

When a command is selected, pre-configured DTMF tones are used to communicate the desired function to the server. The phone can even be used to send data that the user is prompted to provide, such as the date they will be back from a business trip. Feature commands and text descriptions have to be programmed using XML and then imported into the phone.

Ongoing call features are reached from the active call view.

Offline commands and corporate telephony settings can be accessed by pressing the 'corporate telephony' icon once a calling card has been set up. Activating a command will result in an IP packet being sent to the server.

Routing of corporate calls

If a company uses a PABX switch, calls must be routed via the PABX to gain access to corporate features and resources. W950 can route outgoing calls to the corporate switch, instead of to the dialled B-party. To complete a call, the B-number is then sent to the mobile extension port of the PABX and the call set-up is completed. This process is completely transparent to the user.

A user may dial either an internal number, such as, 1234, or a public number, like +468 123 4567. W950 can be set to bypass the switch for certain types of calls.

Configuring the phone for the company

The person responsible for the corporate communication services defines how the phone shall be configured. This may be the company's IT manager, the operator or a service provider. They define what feature commands shall be displayed in the phone, how these commands interact with the PABX switch and what text is displayed. They also define how W950 shall handle calls to and from the corporate switch. This is all done in an XML-structured configuration file, with the extension .pbx. Once created, this configuration file can be easily installed onto the W950.

To ensure that only authorized personnel have access to the PABX, approved mobile phone numbers are added to the list of mobile extensions in the PBX, and only these numbers will be able to use the facilities available.

For more information, see www.sonyericsson.com/professionalsolutions. Look for "Areas of use".

PIM applications

Contacts

The W950 Contacts application holds the details of all the user's contacts. It is fully integrated with the phone and other PIM applications. Each contact can contain multiple phone numbers and email addresses, names, addresses, birthday details, anniversary details, personal notes and a picture or photograph. Most of this information will typically be transferred to W950 when it is synchronized with a PC application such as Microsoft® Outlook® or Lotus Notes®. Contact data can also be added and edited on W950. Local and remote synchronization is possible using the SyncML standard. For more information, see "Synchronization and data transfer" on page 34.

Data can also be beamed to and from W950 using infrared and Bluetooth connectivity. It can also be sent and received using Messaging. For more information, see "Object exchange – 'Send as'" on page 37.

Contacts are displayed in a list, which may be filtered by folder, such as business or personal. To see a contact's details select the contact. Tap the icons alongside the contact's details to launch a phone call, a new message or a URL in the browser.

Calls received from new numbers can automatically cause the user to be prompted to save the number.

Contact details can be added to a distribution list. Distribution lists can be used to send groups of contacts the same email, SMS, EMS or MMS message.

Calendar

The Calendar application keeps track of appointments and events and enables reminder alarms to be set. The calendar view has been enhanced to display the selected day's events on the screen.

Calendar entries are displayed in local time, but all appointments and reminders are saved in UTC (Coordinated Universal Time). If the user moves to a different time zone the calendar updates the appointments and reminders automatically. Meet-

ing requests can be sent from the Calendar application via email. Meeting invitations can be received by email and added in to Calendar.

The alarm signal can be personalized using sound clips. Appointments can be shared using infrared or Bluetooth connectivity, and also by Messaging. Local and remote synchronization are both supported using SyncML. For more information, see "Synchronization and data transfer" on page 34. The Chinese models support the lunar calendar.

Tasks

Tasks is a simple yet powerful application that can be used to make reminder notes. Task items may be beamed, exchanged using Messaging, and synchronized (locally and remotely) using SyncML. For more information, see "Synchronization and data transfer" on page 34.

Notes

Notes provides a quick means of making notes in either text or sketch format. Notes can be launched during a call.

The note is automatically named with the other party's number, name (if known), time of call and date.

Time and alarm clock

Time is a sophisticated alarm clock, which can show the time both locally and in another time zone. If the user swaps the local time zone to the other specified time zone the local time zone is automatically displayed in the second time zone area. Alarms can be set. The alarm signal can be any supported sound that is stored on the phone.

Sound recorder

Sound recorder is a simple screen-driven dictation machine with the added advantage that recordings can be beamed and exchanged via Messaging. Sound recorder can also:

· Record a personal ringtone.

- Recognize music using TrackID[™]. A music clip is recorded and sent to the TrackID[™] service to get the song title, artist and album name, if available. TrackID[™] is a free service.
- Make changes to existing recordings.
- Rename recordings.
- Delete recordings.

Calculator

Calculator has the features of a standard desk calculator, and is always available from the application launcher.

Stopwatch

Stopwatch can be instantly started and stopped to measure an exact duration of time. The stopwatch continues to run when a call is answered. The stopwatch can run in the background if the application is closed. An icon is displayed in the status bar to show that it is running. You can time and record up to nine events.

Converter

Converter helps converting the following measurements: Distances, Volumes, Weights, Temperatures, Speeds, Areas and Currencies.

Speed dial

The user can launch the following features from picture speed dial:

- A call
- An entry in Contacts

Messaging

Email

W950 supports the following standards:

POP3	Used to retrieve and delete messages from an incoming mail server in the network.
IMAP4	Also used to copy, retrieve, move and delete messages from an incoming mail server. IMAP has more features than POP, such as remote folders. IMAP4 also offers support for the IDLE command, which (if supported by the server) offers push capabilities.
SMTP	Used to send messages from a mail client to a mail server.
MIME	A format that describes data, such as defining the attachments included in an email.
•	

Most of the standards above are supported by Internet Service Providers and many corporate environments. W950 is supplied with an Internet wizard which helps users to configure an account. OTA (Over The Air) configuration of email and ISP accounts is supported.

W950 supports SSL and TLS encryption.

Automatic polling can be used so that email is automatically collected and presented in the Inbox. Controls are provided to filter messages based on size, enabling cost and download time to be managed.

Another option enables only email headers to be presented in the Inbox. Headers are quick to download. The user may read and select headers and request the message to be downloaded if necessary.

If IMAP4 is used, the IDLE command can be enabled to keep the phone connected to the email server. This allows the server to push new messages directly to the W950 as they arrive.

Email transmission is performed in the background, making it possible to perform other messaging functions during transmission.

A list of recently used addresses is available when creating a message. W950 allows distribution lists to be created and sender ID information is sent with message alerts.

W950 can send any type of attachment, including the following:

- Pictures
- Video clips
- Audio files
- SIS files
- JAR/JAD files
- Themes
- vObjects (vCalendar, vCard, vNote, vBookmark)

A signature may be set up so that essential details are automatically copied to the end of each outgoing email.

The supplied Sony Ericsson PC Suite for Smartphones enables email to be synchronized with Microsoft Outlook and Lotus Notes. During synchronization, new email from the PC is transferred in to the corresponding 'synchronized email account' Inbox on W950. Messages and replies written using this account on W950 are transferred and sent via the PC.

Web-based email messages can, of course, be accessed using the W950 browser.

Email folders

Messaging accounts have the following folders: Inbox, Outbox, SIM, Draft and Sent. You can create additional folders, see Local folders below.

Local folders

To improve the organization of your folders you can create more folders locally on W950. Local folders are only visible in the Messaging application.

Push email

Push email is a method of 'pushing' or forwarding email to mobile devices as soon as a message reaches the email server. Such solutions may also include Calendar and Contacts synchronization. Push email solutions allow email messages to be delivered in the background in the same way as SMS or MMS messages.

W950 is prepared for push email solutions and a rich set of third party applications are available, for example, OneBridge, Intellisync, BlackBerry, Exchange ActiveSync, Seven Duality, and Visto Mobile.

Push methods

The solutions use different methods to push the messages, usually IP push, by listening to dedicated ports when a session is active, this is similar to instant messaging solutions. Some solutions may also use SMS with triggers to the application to start a sync/download, sometimes referred to as pseudo-push.

Security

All solutions use end-to-end security using SSL, 3DES or AES encryption. Most solutions are based on using a fixed password for push mail. Initially key exchange is also done by using device parameters such as the IMEI number. A few solutions combine push with one-time passwords that are limited for a certain amount of time before being reentered. Many solutions have functionality for enforcing screen passwords. There is also sometimes theft and loss protection through wipe-out commands and lock-out.

Unified mailbox

SMS, EMS, MMS, Local Information, beamed and auto configuration messages are all stored within one unified Inbox in Messaging.

- SMS (Short Message Service) A user can send messages containing up to 160 characters to and from GSM mobile stations (up to 70 characters using unicode text). W950 also supports concatenated SMS messages, that is, a user can write a longer message and W950 will automatically send it using as many SMS messages that are needed. The user can reply to an SMS message with an MMS message and send a fax using the SMS message as the bearer. There is enhanced support for delivery reports and short message class support.
- EMS (Enhanced Messaging Service) Adds powerful functionality to the well-known SMS standard. An EMS message may include

- sounds and melodies, pictures and animations and formatted text. Also EMS messages can be sent as concatenated messages.
- MMS (Multimedia Messaging Service) MMS messages may include combinations of video clips, animations, pictures, sounds and text. The following tasks can be performed using this service: smart uploads and downloads, automatic transmission when leaving Flight mode, video recording directly from the MMS application, background transmission, direct link use (customized shortcuts to an operator's Web site to get new templates), and replying to MMS messages with SMS messages.
- Local information, automatic configuration items, and beamed items are all to be found in the Unified inbox.

Area Information

Area information is SMS Cell Broadcasting.

An SMS cell broadcast allows information to be sent to all mobile phones in a particular geographical area. Information such as traffic news or local weather reports can be sent to an area covered by a single cell or to the entire network.

Broadcast messages are organised into a number of channels. This allows different types of messages to be broadcast on different channels. Using the phone, users can choose which broadcast channels to subscribe to. The requested text messages are received, the message either scrolls

across the standby screen or is placed in the Inbox. The user can choose to save the message to the Inbox or not.

Broadcast subscriptions are controlled from the Area information dialog.

When a user is subscribed to channel 50, and this channel is supported by their network, the ID of the current cell (or group of cells) is displayed below the network operator name in the phone display. This is often the telephone area code or postal code of the current location.

Picture Gallery

Picture Gallery lets the user send and organize photographs. Picture Gallery supports image types JPEG, BMP, GIF (including animated), MBM, PNG, and WBMP in up to 262 k colours. Picture Editor may also be launched from Picture Gallery.

Picture Editor

Using Picture Editor, it is possible to crop, rotate and resize images. The editor also includes fun layers, clip art and tools for drawing on the image using the stylus. Different pen sizes and colours are available, as well as a text tool for formatting and inserting text into the image. When creating MMS

messages, the Picture Editor is used for editing inserted JPEG, PNG, GIF and BMP images as well as for creating simple JPEG image from scratch. A simpler version of Picture Editor is used for creating images for EMS messages.

Entertainment

MusicDJ™

MusicDJ™ is a MIDI sampler with pre-recorded drum, bass, chord and accent loops in different music styles. The samples are combined to create personal polyphonic ringtones.

Games

Gaming on the W950 is greatly improved due to the 3D Hardware accelerator.

Nightclub Empire

Nightclub Empire is a simulation game in which the user can start and manage nightclubs. The goal of the game is to make the nightclubs famous. Purchase cool items, hire staff, scratch records and host foam parties to get the clubs going and keep the customers happy.

QuadraPop

QuadraPop is a simple yet addictive Java[™] based puzzle game. To make an item disappear, at least four items of the same kind (in connection with each other) are needed. The more items that disappear at the same time, the higher the score. During the game, blocking items may appear, to make it harder for the items to connect. A blocking item will go away only if an item next to it disappears.

Browser

W950 features the integrated Opera[™] 8.0 browser. This browser has been designed to display practically all Web pages on the Internet. The browser

supports the de facto HTML standard "street HTML" (used by most Web developers), JavaS-cript™ technology, Frames, and the ability to add

plug-in applications. This means that the users can access their favourite Web pages also from the phone.

Users can quickly and easily switch between portrait and landscape presentation as well as change from a normal view with scroll bars to full screen view. Pen motions are used to slide the page on the screen.

Users can select 'fit to screen' to reformat pages to fit inside the screen width and eliminate the need for horizontal scrolling (Small Screen Rendering is supported).

Some key features:

- Tap and hold on a bookmark to display the page in a new window.
- Tap and hold a link to view a context-sensitive menu of alternative actions: an http link would give the options Open, Open in new window, Open in background and Send as.
- Secure downloads manager Especially useful for downloading commercial media objects that need to be paid for.
- Pages can be saved for offline viewing.
- All private data can be cleared with one command.
- Built-in pop-up blocking.

Browser security

W950 supports TLS/SSL to provide a secure encrypted link between the browser and the Web site. This method is commonly used for secure transactions on the Web. An icon in the display indicates when a secure connection is in use.

TLS Security

When using certain Internet services such as banking, the user may require a secure connection between the phone and the Web site. W950 is based on the WAP 2.0 specification where security functionality is specified with a technology called WAP TLS Profile (Wireless Application Protocol Transport Layer Security).

The Internet protocols that handle the connection, its transport and its security are structured in protocol layers. The security is handled by the TLS layer operating above the transport protocol layer. There are three TLS classes that define the levels of security for a TLS connection:

- Anonymous TLS involves encryption with no authentication.
- Server authentication involves encryption with server authentication.

 Client authentication involves encryption with both server and client authentication

Server authentication	Requires a server certificate stored at the server side and a trusted certificate stored at the client side.
Client authentication	Requires a client certificate stored at the client side and a trusted certificate stored at the server side.

Certificates

To use secure connections, the user needs to have certificates saved in the phone. Certificates can be downloaded and installed when required. There are two types of certificates:

W950 is preinstalled with X.509 certificates from Baltimore, Entrust, Geotrust, GlobalSign, GTE Cybertrust, RSA, Sony Ericsson, Thawte and Veri-Sign.

Certificate A trusted certificate used to verauthority ify that a Web site is genuine. If the phone has a stored trusted certificate of a certain type, it means the user can trust all Web sites which present a certificate that can be verified by the trusted certificate. Certificates are preinstalled in the phone and can be downloaded from the trusted supplier's Web page. User A personal certificate that vericertificate fies the user's identity. A bank that the user has a contract with may issue this kind of certificate.

RSS feeds

RSS provides a way for Web sites to distribute their content outside of a Web browser. A news Web site might have an RSS feed which contains breaking stories, while a magazine Web site may provide an RSS feed with excerpts of their latest articles.

An RSS feed is a file containing a list of news items, each of which has a title, a description and a URL link to read more on the content provider's Web site.

With the RSS Feeds application the user gets information from the Internet into an easy-to-view format without browsing the Web sites. The user can browse information from dozens – or hundreds – of Web sites without ever visiting them.

With RSS Feeds the user can do the following:

- Subscribe.
- Update feeds manually or via a predefined schedule.
- · Organize feeds into folders.
- Read news items.

- Send a news item to another device via email, SMS, MMS, Bluetooth or infrared connectivity.
- Link to more information via the Web browser.

Connectivity

Bluetooth™ wireless technology

W950 features the built-in Bluetooth™ 2.0 wireless technology. Its Bluetooth power class 2, +4 dBm radio link, operates in the globally available 2.4 GHz radio frequency band, ensuring fast and secure communications up to a range of 10 metres, or more in ideal conditions. Please note that in the few countries where the use of Bluetooth wireless technology is not allowed, the Bluetooth function will be disabled. In countries where only lower output than 4 dBm or 0 dBm is allowed, the output is limited as a customized factory setting.

Bluetooth wireless technology facilitates instant connections, which are maintained even when the devices are not in the line of sight. Enhanced audio quality voice transmission is provided under adverse conditions, making it possible to use a headset connection at all times.

Using Bluetooth wireless technology in the W950

True wireless connection

Connect without cables to headsets, car handsfree equipment, computers/PDAs, digital still and motion video cameras and other devices.

Up to 16 added devices

The W950 identifies and maintains up to 16 devices which are displayed in a list.

Radio link

No line of sight is required; the phone can remain in a briefcase or in a pocket (infrared requires line of sight).

Secure and fast

Data connection with a Bluetooth connectivity PC/ laptop or PDA turns the phone into a modem for connecting to the Internet and for data transfer (faster than infrared or cable).

Synchronization

Fast synchronization, even without line of sight, of calendar, notes and phonebook with PC/laptop.

Business cards

Quick exchange of business cards, notes and calendar events with other phones and devices.

Imaging and music

Exchange still images and video clips with another mobile phone, a PC/laptop, or with a digital still or motion video camera. Use the W950 as a modem to send pictures from a digital camera to an imaging server.

Exchange music files with another mobile phone and a PC/laptop. Play MP3 and MIDI files sent by the phone.

Enable images to be shown on a TV or another display via an accessory, such as the Bluetooth Media Viewer MMW-100.

Transfer stereo audio in real time, to a stereo headset that supports A2DP, Bluetooth audio streaming.

Audio quality

W950 uses an algorithm that repairs lost audio packets. When needed, a new packet is inserted with content based on previous packets. This, in conjunction with the high sensitive and high output power radio will enhance the audio quality compared to a standard Bluetooth device.

File sharing

By using the Server role of the File Transfer Profile, the phone enables the use of a computer to manage content files that reside in the phone's file system. Most computer Bluetooth applications provide an explorer-like user interface for the file transfer service. The content in the Games and

more folder is not exposed in the file transfer server. Opening one of the folders will show a list of files related to that folder, such as, images in the Pictures folder. Using the computer application the user can now: retrieve files from phone to computer, delete files from the phone and transfer files from the computer to the phone using the normal drag and drop mechanisms provided by the computer.

File browsing

By using the Client role of the File Transfer Profile, the phone enables the user to access file systems of other devices, that support the Server role of the same profile. After pairing the phone with the other device, the user can connect to the other device by selecting it in the 'My devices' list under the Bluetooth menu and selecting the browse option that should be available on the left selection key. If the browse option does not appear the user can select the Service option to update the phone's knowledge that file browsing is possible with this device. When the phone is connected to the file server, the user can browse the shared folders and retrieve files listed in the folders. The user can transfer files to the file server device using the normal Send/via Bluetooth option.

Media viewing

The phone can send images and sounds to a media viewer device, such as, the MMW-100 TV adaptor accessory. The user can also conveniently run a slide show on the TV showing a set of nice phone camera pictures for family and friends. The phone can connect to a Bluetooth device that can receive images, the image can be transferred to the remote screen and displayed.

Profiles

The following Bluetooth profiles are supported in the W950:

- Dial-up Networking Profile
- Generic Access Profile
- Generic Object Exchange Profile
- Object Push Profile
- Serial Port Profile
- Handsfree Profile
- Headset Profile
- Synchronization Profile
- Basic Imaging Profile
- File Transfer Profile

- Human Interface Device (HID) host only Profile
- Stereo Advanced Audio Distribution Profile
- Advanced Audio/Video Remote Conference Profile

Remote control

The phone keypad is configured for control of a certain computer application through a special type of HID configuration file consisting of an XML file for the keypad and an image for the display. HID configuration files can be downloaded into the phone using the normal file transfer mechanisms.

Users can even modify the files themselves on their computers. A few configuration files, pre-loaded in the phone, enable the user to navigate on a computer desktop and control presentations and Media players.

System functions

Characteristics

The HID configuration files, and the set of predefined HID configuration files, are customizable. The configuration files can be modified by the user if transferred to, and opened on, a computer.

Used enablers and bearers

The HID based remote control function works over Bluetooth. It is possible to download the HID configuration files via a Bluetooth, IR or USB connection. It is also possible to transfer the files to another device using a Bluetooth or infrared connection.

Power save mode

The phone uses sniff mode on headset, handsfree and HID connections which means reduced power consumption and shorter connection set-up times.

IrDA

IrDA (Infrared Data Association) is a point-to-point communication link between two infrared ports. The infrared beam has to be directed towards the target infrared port and as long as the two infrared ports are within sight and range, the devices can exchange data.

Object Exchange via infrared (IrObex) supports the transferring of objects between compatible phones. The W950 can be used to control electrical devices that have an infrared port, such as, a television or DVD player.

USB

W950 is USB 2.0 (Universal Serial Bus) compliant. The idea of the USB is to allow easy connection of a mobile phone to a PC. USB is designed to be "completely Plug and Play", meaning that devices will be correctly detected and configured automatically as soon as they are attached.

USB in a mobile phone means convenient data transfer between the phone and a PC.

Synchronization of PIM applications with a PC using the Sony Ericsson PC Suite for Smartphones application uses the USB full-speed mode at 12 Mb/s.

For transferring large amounts of data, the user can select USB 2.0 high-speed up to 480 Mb/s. This greatly reduces the time needed to transfer, for example, a large number of music files.

W950 supports USB charging, however, not in high-speed mode.

Data storage

The memory of W950 is divided into:

- A phone memory with a phone part, and an 'Organizer' part running Symbian OS. The 'organizer' part consist of a RAM (Random Access Memory) that is controlled by the Symbian OS, and a 128 MB flash memory. The flash memory is split into 68 MB for operating purposes and up to 60 MB for storage of user data, additional languages and settings such as the active theme. This part behaves just like a normal disk drive. The folders can be viewed and managed from the File manager application or from a connected PC.
- A 4 GB flash media memory for user file storage, primarily intended for music files. This memory behaves like a normal disk drive. It can be accessed as a USB mass storage device from a PC, allowing the fast transfer of files.

Flash memory retains data even with no power applied. Unlike some PDA devices, W950 does not require a small 'memory backup' battery. Data stored on W950 is therefore not subject to loss due to such a battery running down.

User storage

The user storage space of the phone memory (C: drive) and media memory is shared across applications without any imposed restrictions, apart from the whole space becoming full.

Unlike a PC, the user does not need to be aware of the underlying filing system. Applications will always store information automatically in the appropriate folder, simplifying the management of data. Third party applications may implement more complex file management solutions where required.

The W950 supports USB high-speed data transfer at 480 Mbps. In this mode, the phone is seen as a USB mass storage device from the PC. The first time the phone is connected to a computer via USB, the user will be given the choice to enter either normal mode or mass storage mode. The mode can be changed at any time from the phone's

control panel. When connected to computer in mass storage mode, the media memory and all files stored on it are inaccessible from within the phone and its applications. The media memory is accessible again as soon as USB is disconnected. Normal mode must be used when synchronizing PIM applications or making backups using the Sony Ericsson PC Suite for Smartphones application.

User storage configuration

Applications and information are placed in the phone memory of the W950 in the factory. This provides sample demonstrations, educational, multimedia and fun contents so that W950 can be used directly out of the box. Much of these contents can be deleted by the user in order to make the space available for personal use.

Action at master reset

Master reset restores the phone to its purchase state, all user data is deleted. When a master reset is initiated the user can select to keep all user-installed applications. Data can be restored as follows:

If the user has previously backed up the W950 using the Sony Ericsson PC Suite for Smartphones application, then the C: drive can be restored to the condition it was in when the backup was made. The exception is DRM Forward Lock protected files which cannot be transferred to other media and therefore not backed up.

Otherwise, data can be re-loaded from the Sony Ericsson Web site.

Since Multimedia content is easily transferable using infrared or Bluetooth wireless technology, it is simple to restore favourite content from someone else's W950 (unless DRM protected).

The 4 GB media memory is not affected by a master reset.

Folder view of internal storage

When viewed from a PC using the Sony Ericsson PC Suite for Smartphones application, the 'C:' drive is named 'Phone memory', but only a subset of the folders is accessible from the PC.

The 4 GB flash memory is named "Media memory".

On both the phone memory and the media memory, there is a folder for each media type: audio, video and image. Documents are stored under the 'document' folder. An 'Other' folder provides a place for files that do not fit into the other categories

A folder is created beneath the applicable media type. There is no limit on the number of subfolders that can be created. Unfiled folders are created in the initial folder structure and all material is placed in the unfiled folder by default. Sony Ericsson Multimedia Content is stored in 'Sony Ericsson' subfolders.

Synchronization and data transfer

To be truly mobile, users must be able to carry their important information with them. Equipping mobile phones with Personal Information Manager (PIM) programs like calendars, task lists and phonebooks gives users access to their most important data anywhere and anytime. The information is kept updated by synchronizing it with the information at the office or at home. The growing use of group-

ware such as Microsoft Outlook means that more and more meetings are booked electronically in daily business life.

W950 uses the SyncML 1.2 protocol for synchronization. This means that it has the compatibility to synchronize with a wide variety of devices over a number of different communications media.

SyncML – an open standard for synchronization

SyncML background

Leading the way in providing remote synchronization capability, Sony Ericsson realizes that interoperability of remote synchronization is of utmost importance if mobile data usage is to become as widespread as generally predicted. That is why Ericsson, along with IBM, Lotus, Motorola, Matsushita, Nokia, Palm Inc., Psion and Starfish Software, founded the SyncML initiative in February 2000. Supported by more than 600 software and hardware developers, the SyncML initiative seeks to develop and promote a globally open standard for remote synchronization, called SyncML. Unlike many other synchronization platforms, SyncML is an open industry specification that offers universal interoperability. Since it uses a common language, called XML, for specifying the messages that synchronize devices and applications, SyncML has been called the only truly future-proof platform for enabling reliable and immediate update of data. The benefit for the end user is that SyncML can be used almost anywhere and in a wide variety of devices, regardless of application or operating system.

W950 uses SyncML for both local synchronization (with a PC using Bluetooth connectivity or a cable connection) and remote synchronization over HTTP.


What information can be synchronized in the W950?

Application	Remote sync	Local sync
Contacts	✓	✓
Calendar	✓	✓
Tasks	✓	✓
Note (text part only)	**	✓
Email	**	✓
Bookmarks	**	✓

** Note, Email and Bookmark implementation are proprietary and therefore not SyncML compliant.

Remote synchronization

Remote synchronization takes place over the air using HTTP and is the ideal way to keep the W950 up to date. 3G enables a fast connection to the network – the synchronization can be started in seconds.

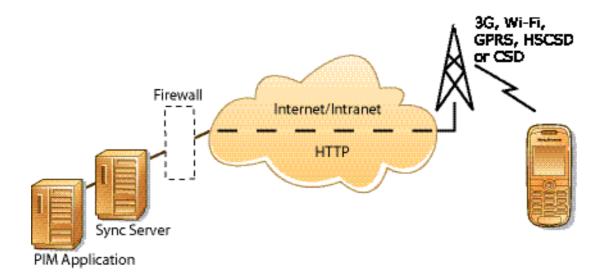


Synchronization services will be offered by thirdparty service providers and as added capability to corporate PIM applications. Corporate PIM applications such as Microsoft® Exchange can be supplemented with SyncML capability.

Server alerted synchronization

If updates are made on the PC the server automatically notifies W950. The updates are automatically synchronized to W950. A remote server can initiate a synchronization with the W950 using WAP Push.

Local synchronization

W950 is supplied with PC software for local synchronization. It may be loaded from the CD-ROM.

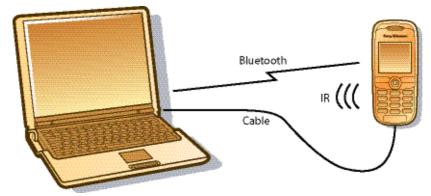

Bluetooth wireless technology, infrared or cable

W950 always synchronizes using SyncML, regardless of connection type. It connects via Bluetooth wireless technology, infrared or USB cable. The cable is connected directly to the phone or via the desktop charger connector.

Automatic synchronization

Synchronization can be configured to start automatically, given that a suitable synchronization program must be running on the other device:

- When the USB cable is plugged in to W950.
- When Bluetooth is activated on both devices and they come into operating range.
- When infrared is activated on both devices and the infrared sensors are aligned.

Intelligent process

A synchronization engine performs the task of synchronizing. For local synchronization, the synchronization engine is an application that runs on the desktop computer. The synchronization engine compares, updates and resolves conflicts to ensure that the information in the phone is the same as that in the computer.

Compatibility

The PC software, supplied with the phone, enables synchronization with the following applications:

Microsoft® Outlook® Express 4.0, 5.x.

- Microsoft Exchange.
- Microsoft Outlook 2000, 2002, 2003.
- Microsoft® Internet Explorer 5.0 and 6.0 (for Bookmark synchronization).
- Lotus Notes 5.0, 6.0, 6.5.

The PC requirements are as follows:

- 120 MB free space on hard disk.
- Microsoft® Windows® 2000 (SP4) or XP Professional or Home (SP2).
- Minimum recommended hardware configuration for the version of Microsoft Windows in use.

File transfer utility

A utility is provided which enables files to be transferred to and from a W950 connected to a PC. Typical uses for this include:

- Storing music files on W950.
- Moving images to W950 to use, for instance, in personalization, MMS messages.
- Moving sound clips to/from W950 for personalization.

Backup and restore

Backup is initiated from the connected PC. Note that the USB cable must be used for backup. Infrared or Bluetooth wireless technology cannot be used for this purpose. Files in the user data area (which includes loaded third party applications) are backed up to PC storage.

The restore utility takes stored data from the PC and places it back on to the W950.

Language change utility

W950 has a larger, richer user interface compared to an ordinary mobile phone. Applications often have help information. Consequently, it is impractical to store languages on the phone. To facilitate a language change, a PC utility is provided which enables the required language to be loaded on the W950. The language change utility is not available for Chinese models.

Software installation utility

This utility enables W950 applications to be installed from a PC.

Internet wizard

This utility assists the user to create 3G, GPRS, HSCSD and CSD connection definitions for Internet and email use. All the necessary information can be entered in a logical way. Set infrared status to Modem in the Control Panel to use this facility over an infrared connection.???

Object exchange - 'Send as'

W950 makes it easy to transfer objects over a Bluetooth or infrared connection, or by sending a message. This is presented to the user via 'Send as' commands in applications. Simply select an item, such as a contact, select 'Send as' and select the method to be used for sending. Typical applications are to beam an appointment to other people, or to receive a new background image.

	Bearer > IR	Bluetooth	SMS	MMS	Email
Application (Data Type)					
Contact (vCard)	✓	✓	✓	✓	✓
Appointment (vCall)	✓	✓	✓	✓	✓
Tasks (vCall)	✓	✓	✓	✓	✓
Note**	✓	✓	✓	✓	✓
Image	✓	✓		✓	✓
Sound Clip (Ringtone)	✓	✓		✓	✓
Bookmark	✓	✓	✓	✓	✓
Sound recorder (Voice Notes	s) 🗸	✓		✓	✓
Third Party Application ('Send as' API)	✓	✓		✓	✓

To perform a 'Send as' beam operation using infrared, the two devices are lined up and the sender initiates the transfer.

To beam over a Bluetooth connection, a scan finds other devices within range. The user can then select the required device and send the information across.

When sending over SMS, MMS or email, the required message type is created with the selected object attached. It is then sent over the air.

Sony Ericsson PC suite

The Sony Ericsson PC Suite for smartphones CD-ROM includes the following:

Local Synchronization	PC software for synchronizing PIM data between the phone and PC applications such as Microsoft Outlook and Lotus Notes.
Backup Manager	Utility to back up the data from the phone for storage on a PC. Restore enables data to be returned to the phone, such as after a software upgrade.
File Manager	Enables Windows Explorer to see the phone as a device and the phone memory and media memory as two disk drives on the device. Multimedia files may be copied between the PC and the phone.
Application Installer	Utility to install new applications from the PC.
Download Language	Enables the user to load a different language from www.SonyEricsson.com/support and switch the phone UI to that language, assuming the specific phone supports this.
Mobile Networking Wizard	A wizard that helps the user to set up 3G, GPRS, HSCSD and CSD connections so that a personal computer can be connected to the Internet, or to a corporate network, via the phone.
Sony Disc2Phone	Software for loading your phone with your favourite tracks. You can use it to search for music on your computer or audio CDs, convert your existing music files, and then copy the MP3s to your phone.
Adobe™ Photshop™ Album Starter Edition	Software for viewing, finding, fixing, and sharing your photos.
Apple QuickTime Player	QuickTime Player is a multimedia player that you can use to view many kinds of files, including video, audio, still images, graphics, and virtual reality (VR) movies. QuickTime supports the most popular formats on the Internet for news, sports, education, movie trailers, and other entertainment.
Drivers	Drivers for using the phone as a modem over an infrared, Bluetooth or cable connection.

DRM

Digital Rights Management, DRM, is a technology that enables the secure distribution, promotion, and sale of digital media. Examples of such content include music, personal images, wallpapers and screen savers with themes from films, ringtones from musical artists, and branded games. In other words, content providers can control how users may use different types of content in devices,

such as mobile phones, phones or PDAs. Content providers can also control the use of content in related services, such as MMS and download. Sony Ericsson is actively focusing on technology standardization for the DRM concept, and supports the ongoing standardization work and activities of the OMA (Open Mobile Alliance). Sony Ericsson is fully committed to open standard solutions in the

mobile environment and is a principal driver of many open standard initiatives. This will ensure the interoperability of mobile terminals in the DRM area and also result in a strong, competitive DRM standard.

The W950 supports OMA DRM 2.0 giving the same user experience as OMA DRM 1.0. OMA DRM 1.0 is supported as described below.

FWL - Forward Lock

W950 supports OMA DRM Forward Lock which is the simplest OMA DRM case, with no special access keys defined. The content is provided in a single DRM packaged file, thus protecting the content from being distributed from the device by the user. It enables a secure means for the content provider to deliver/provide content which incurs a charge. Forward Lock content will normally be received by W950 as part of an MMS message or via HTTP download. W950 supports OMA Download. For more information, see www.SonyEricsson.com/developer.

CD – Combined Delivery

W950 supports OMA DRM Combined Delivery/Forward Lock. Content and associated access keys are downloaded or delivered to the user as a single DRM packaged file. This means the content, or access keys issuer, controls the extent the content can be used. As with pure Forward Lock, the user will be unable to distribute this content for use on another device.

SD - Separate Delivery

W950 supports OMA DRM Separate Delivery. Content and associated access keys are received as separate DRM packages, either simultaneously or at different points in time. This enables the distribution of content to other users and has the same possibilities to control usage of the content as exist

with Combined Delivery/Forward Lock. Distribution of the content to other users will require the recipient to obtain access keys from the rights issuer in order to use the content.

Protection properties

Content that is protected according to the OMA DRM standard is given special properties.

Content with Forward Lock protection cannot be further distributed: The user cannot send the content to other devices since the "Send to" option is disabled for media protected with Forward Lock.

All three types of protected content packages can be transferred to the media memory, thereby enabling the storage of large amounts of content.

OMA DRM Forward Lock/Combined Delivery protected content on removable media cannot be used in another device other than the device it was saved on. Only Separate Delivery packages can be used on another device, after obtaining access keys to use the content on the new device. Access keys to use the content can never be distributed from user to user (device to device). Access keys always have to be obtained directly from the rights issuer.

DRM package

DRM packaging software is typically included in the software used by the content provider. It is used to create the DRM package according to the OMA DRM standards before it is delivered to the device, including content and associated access keys.

In Japan, only files with SD protection for playback will be accepted in the Media player and in some European markets only DRM content can be used for automated use/themes such as ringtones.

Personalization

W950 can be personalized by the user in one of the following ways:

• Update the User Interface using services, such as, M-Service.

- Use PC-based utility application.
- Via Over the Air (OTA) configuration, initiated by the operator, user or IT helpdesk.

Alterations to the appearance of many of the screens may be simply carried out through changing the phone's Theme. New themes may be loaded on to W950 from the Internet and other sources.

Background and application shortcuts

Users can set a static image, or animated GIF, to be the background 'wallpaper' for the standby screen. Formats JPEG, GIF, BMP, WBMP, MBM and PNG are supported. Larger images will be resized to fit. The application shortcut buttons may be personalized by the user.

Screen saver

A 'screen saver' image can be displayed after a period of inactivity. The user can switch this facility on and off. Supported formats are the same as for the background image above. Note that the use of animated GIF increases power consumption.

Device lock may be used in combination with the screen saver. Upon pressing a button or touching the screen, the user will be prompted to activate keys and/or enter the device lock code.

When the screen saver is deactivated, the W950 will revert to the state it was in before the screen saver was activated.

Picture phone book

The user may store a picture of each contact in the Contacts application. When an incoming call is received with a CLI (Calling Line Identification) matching a phone contact, the contact's picture is displayed together with the other information. The contact's picture is also displayed when making a

call, or using the speed dial screen in picture view mode. A copy of the picture is held in the Contacts database. Therefore, the original picture may be deleted or renamed without losing the copy stored in Contacts.

Ringtones

The user can add as many ringtones as desired, subject only to available file space. Ringtones may be collected from many sources including MMS, EMS and transfer from a PC.

Any compatible audio file in the multimedia storage (in phone memory or media memory) including MP3 can be selected as a ringtone. The W950 can play both iMelody format ringtones and the following polyphonic formats: AMR, AU, MIDI, RMF (Beatnik), MP3 and WAV.

A system default ringtone is provided. This is the ringtone when the W950 is first initialised. It cannot be deleted and is retained after a master reset.

A personal ringtone may be selected for a contact – simply select the required ringtone while entering or editing the contact's details. When the Calling Line Identification (CLI) of the incoming call is matched to a contact, the personal ringtone for that contact will be played. If the ringtone has been deleted, moved, renamed or is located in the media memory and the phone is connected to a PC as a USB mass storage device, then the system default ringtone will be played.

If no CLI information is available, then only a default ringtone can be played. If the user has selected a personalized default ringtone and it is available (can be read from the phone memory or media memory) then it will be played, otherwise the system default will be played.

Themes and skins

A theme or skin is a way to provide a complete customized visual experience for the user.

Themes can define:

- Text, outline and background colours.
- Background images.

- Graphical appearance of interface elements.
- Sounds for events, for example, ring signals, message alerts, notification, area info, auto setup and reminder.

Themes and skins can be created or downloaded.

Over-The-Air (OTA) Configuration

OTA remote configuration provides a simple setup of services. The user is spared the task of finding complex technical information and then manually entering it via the user interface. Instead, a Web request or a call to the mobile operator's helpdesk is all that is needed – the appropriate settings are then sent via SMS directly to the phone.

OTA configuration using the OMA Client Provisioning v1.1 (WAP OMA Provisioning) specification – a backward compatible extension of the client provisioning functionality included in WAP 2.0 (v1.0) – enables the following parameters to be provisioned:

- WAP account (account name and WAP Gateway settings).
- ISP settings (bearer information, username, password).
- Browser settings including Bookmark (name and URL).
- OMA DS Sync settings (SyncML).
- MMS settings.
- Email account for POP3, IMAP4 and SMTP including settings (username, password, address, server details).
- · OMA Device Management.

Sony Ericsson phone configurator

To configure the phone for Internet, email and MMS the necessary settings for many networks can be downloaded from www.sonyericsson.com/support. This is a free service to owners of Sony Ericsson mobile phones.

Locks

W950 has the following lock functionality:

Keylock

The Keylock can be turned on or off by:

- A long press on the back key from standby view.
- The standard keypad sequence (# then unlock) from standby view.

Keylock can also be turned on from the status bar more menu.

Auto keylock is a user setting, only activated from standby.

Phone lock

The phone lock can be set to 'off', 'at power on' or 'when SIM changed'.

When set to 'at power on' the phone lock code has to be entered every time the phone is turned on.

When set to 'when changing SIM' the phone lock will be activated if the SIM is changed, this prevents other users from using the phone with their SIM without the owner's consent.

The code can be changed by the user as long as they know the current code.

SIM card lock

The SIM card lock can be set to 'off' or 'at power on'.

If the SIM card lock is set to 'off' the SIM can be used by any user without the SIM owner's consent.

If the SIM card lock is set to 'at power on', every time the W950 is switched on the user will have to enter a predefined code. The code can be changed by the user as long as they know the current code.

3G

Increased 3G data rates, together with extended multimedia and entertainment content, has enhanced the use of mobile Internet in a revolutionary way.

The 3G (third-generation) service combines highspeed radio access with IP (Internet Protocol)based services.

The connectionless nature of IP makes access a lot faster – file downloads take less time and we can be connected to a network within a few seconds.

3G has significantly boosted network capacity, allowing operators to support more users and offer more sophisticated services. The W950 is a dual mode phone, meaning the user will be able to use it without having to think about which system is in operation – the handover between the two systems is seamless.

GSM and WCDMA development

Wideband technology is deployed in parallel with the enhancement of the existing spectrum, reusing parts of the GSM infrastructure. All spectrum assets are valuable, as there is a substantial increase in both the number of subscribers and the volume of traffic in the networks. This seamless solution gives operators a flexible network where the systems interact according to current demand.

User experience

For the consumers, using a network consisting of GSM, GPRS and WCDMA parts is a seamless experience. GPRS allows qualified mobile Internet applications, while the introduction of WCDMA brings a whole new set of user services, using the full potential of wideband data transport.

Handover/service continuity

The scope of this text includes service requirements for handover maintaining continuity of service to a wireless terminal, as it moves between the radio coverage area, or "cells", associated with different base station sites. This functionality is called "handover". It is a key requirement to allow for dual or multi-mode terminals to handover traffic from

UTRAN to other radio systems such as GERAN and vice versa. This part describes the general principles for service continuity within UMTS Radio Access Network, within GSM/GPRS and between UMTS Radio Access Network and other radio systems such as GSM/GPRS. As a principle, the requirements on service continuity characteristics should be according to the target network on which the service is maintained.

Service continuity

Service continuity should support the following scenarios:

- Continuity of active circuit switched services when moving within UMTS Radio Access Network, within GSM/GPRS and between UMTS Radio Access Network and GSM/GPRS coverage areas.
- Continuity of active and packet switched sessions when moving within UMTS Radio Access Network, within GSM/GPRS and between UMTS Radio Access Network and GSM/GPRS coverage areas.

General operational considerations

Mechanisms defined to support service continuity between different radio systems or radio access modes should effectively cope with a number of coverage scenarios:

- Limited coverage in a "sea" of coverage provided by another radio system or radio access mode.
- Selective operation at a geographical boundary, with extensive UMTS Radio Access Network coverage on one side, and extensive coverage from another radio system on the other side.
- Geographically co-located areas of UMTS Radio Access Network coverage and another radio system.

Performance requirements

Temporary degradation of service caused by handover

During intra-UMTS Radio Access Network handover or handover from UMTS Radio Access Network to GSM/GPRS, degradation of service should be no greater than during intra-GSM/GPRS handover. The duration of the discontinuity experienced by packet switched and circuit switched real time services should be shorter than that in the handover of voice calls over GSM/GPRS.

Requirements on multiple bearer services handover from UMTS radio access network to GSM/GPRS

Consideration must be given to services that may involve multiple bearer services (and simultaneous sessions). The mapping between UMTS Radio Access Network bearer services and GSM/GPRS bearer services depends on many factors such as data rate, delay constraints, error rate etc. In the event that certain UMTS Radio Access Network bearer services cannot be handed over to GSM/GPRS, the handover of some of the bearers to maintain the service should not be precluded.

In the case where a user equipped with a dual mode terminal is in UMTS Radio Access Network coverage, and has multiple PDP contexts activated (for instance to support multimedia), then it is preferable to handover one PDP context, rather than dropping all of them.

As a first priority only the PDP contexts which have an associated QoS that can be supported by the GSM/GPRS should be candidates for handover.

If there are still multiple PDP contexts as "handover candidates", then the operator should choose which PDP is maintained. When roaming, the serving network should make this decision. The operator may choose to either:

- Drop all of the PDP contexts.
- Choose one based upon criteria such as duration, amount of traffic transferred, etc.

Handover in W950

The W950 is compliant with the 3GPP™ R99 December 2002 release.

GSM to UMTS

The W950 supports circuit-switched voice handover from GSM to UMTS.

UMTS to GSM/GPRS

The W950 supports packet-switched data handover and circuit switched voice handover from UMTS to GSM/GPRS.

Positioning

The basic cost efficient positioning method available in 3G networks relies on measuring round-trip time. In 3G it is called Cell-ID + TA (Timing in Advance).

Time difference measurement, involving several base stations, can be used to obtain a more accurate position.

Positioning methods are already used to support location-based information services such as [©]YellowPages, restaurant guides, traffic information,

directions and friend finder applications. Typically SMS or voice has been used as delivery mechanisms. JavaTM and MMS will add new possibilities to deliver attractive location-based applications.

GPRS

The introduction of GPRS was a big step in the evolution of GSM networks for enhancing the capabilities of data communication. Data traffic has increased (over both wired and wireless networks), with the growth in demand for Internet access and services paralleling that of mobile communications.

We can now see that the demand for high-speed Internet access is the key driver for coming generations of wireless multimedia and entertainment services, and GPRS is important as a stepping stone when we enter the 3G network era. GPRS has allowed innovative services to be created and granted access to new and previously inaccessible market segments, which will be further developed with 3G.

GPRS is able to take advantage of the global coverage of existing GSM networks. Applications developed for GPRS have been deployed on a large scale and have thus reaped the associated benefits.

With GPRS, W950 sends data in "packets" at a very high speed. The phone remains connected to the network at all times, using transmission capacity only when data is sent or received. Instead of occupying an entire voice channel for the duration of a data session, W950 sends and receives data in small packets, as needed, much like IP on the Internet. Thanks to this, the phone is always online,

using transmission capacity only when data is sent or received. W950 is compatible with GPRS R99. The GSM system limits the ability to use all eight time slots, so W950 uses up to four time slots for receiving data, and up to one slot for transmitting data.

Information about the identity of the phone and the characteristics of the connection are described in the PDP (Packet Data Protocol) context. This information is stored both in the phone and in the mobile network, so that each phone is identified and "visible" to the system.

Using GPRS with W950 has many advantages:

- Constant connection Keep an open connection to an email system or the company network, staying online to receive and send messages at all times. All connection settings can be managed by using the data connections feature.
- High speed Gain access automatically to increased bandwidth when downloading large files such as images.
- Cost efficient Use transmission capacity only when needed, thus reducing costs.
- Email over GPRS Remain connected to an email system while reading and preparing messages (which are then sent at high-speed).

Symbian OS operating system

Symbian OS is the open operating system licensed by the world's leading mobile phone manufacturers. It is designed for the specific requirements of advanced 2G, 2.5G and 3G mobile phones. Symbian OS combines the power of an integrated applications environment with mobile telephony, bringing advanced data services to the mass market.

Symbian OS supports a wide range of device categories with several user interfaces, this includes UIQ, which is the software platform used by W950.

Key features of Symbian OS v9.1

General

- Improved system performance, especially at start-up.
- New multimedia framework supporting recording, playback and streaming.
- Graphics Direct access to screen and keyboard gives high performance; graphics accelerator API; increased UI flexibility (support for multiple simultaneous display, multiple display sizes and multiple display orientation).
- Java[™] support supports the latest wireless Java standards. For more information, see "Java[™]" on page 47.
- Communications protocols wide area networking stacks including TCP/IP (dual mode IPv4/v6) and WAP 2.0, personal area networking support including infrared (IrDA), Bluetooth connectivity and USB; support is also provided for multihoming and link layer Quality-of-Service (QoS) on GPRS and UMTS networks.
- Ready for the 3G market supports WCDMA (3GPP™ R4), GSM circuit-switched voice and data (CSD), packet-based data (GPRS), SIM, and U-SIM.
- International support Supports the Unicode Standard version 3.0.
- Data synchronization over-the-air (OTA) synchronization support using OMA standards (OMADS 1.2); PC-based synchronization over infrared, USB and Bluetooth connections; a PC Connectivity suite providing the ability to transfer files and synchronize PIM data.
- Improved device management which provides network operators and enterprises with new capabilities to manage phones in the field. This includes OMA DM 1.1.2 support and OMA client provisioning 1.1.
- Support for Bluetooth wireless technology eSCO and Bluetooth stereo headset profiles have been implemented.

Security

The aims of the security developments in Symbian OS v9.1 are to protect the integrity of the phone, provide extra control over user billable events and to prevent malicious software corrupting executables and data. The aims have been met by:

- Providing platform security by a proactive system defence mechanism based on granting and monitoring application capabilities through Symbian-signed certification. The infrastructure allows applications to have private protected data stores.
- A proactive defence mechanism against malware. The platform security infrastructure uses a capability-based model, which ensures that sensitive operations, such as, modifying user data, making calls and using network connections, can only be accessed by applications which have been certified by an appropriate signing authority.
- Data caging, which allows applications to have their own private data protection. This allows applications a guaranteed secure data source. This can be used for applications, such as, ecommerce. An application can access other directories marked as open but cannot access another application's private directory.
- Additional platform security includes full encryption and certificate management, secure protocols (HTTPS, SSL and TLS) and WIM framework.

EKA2 kernel

- A new realtime kernel (EKA2) with guaranteed response times provides the basis for a robust and power-efficient phone. Predictable real time operation means that the OS will respond to interrupts, system and user threads within a known period. This means that no task in the system can prevent the OS from responding to key tasks.
- Support for multiple simultaneous IP connections.

Development and testing

- Provides new customization and configurability options for the operating system.
- Symbian OS is built using the ARM RVCT 2.1 compiler. This compiler is compliant with the ARM EABI standard. This allows compatibility with the latest ARM compilers and reduces the Symbian OS footprint while enhancing performance.

 Developing for Symbian OS – native system and application development in C++, supported by CodeWarrior and shortly Eclipse-based IDEs. Java MIDP 2 supported by all mainstream Java tools. PC-hosted emulator for general development.

UIQ 3.0

The new UIQ 3.0 platform offers support for multiple form factors on the same code base and ease of operator configuration.

UIQ 3.0 is based on Symbian OS v9.1 and is equipped to meet the various demands from phone manufacturers, network operators and end users.

 Customization of software is important. UIQ 3.0 offers new features for operator customizations and branding. Sony Ericsson will use these features to configure W950 to meet requirements

- from network operators. The same customizations can then be re-used on other UIQ phones with different form factors.
- Developers can utilize the new features of UIQ
 3.0 to easily develop applications.
- The SDK (Software Developers Kit) can be used to expand these applications or create new ones. Building blocks, layout managers and a wide range of controls, such as menus and dialogs, make it easier to design applications for UIQ. Using these tools also gives the applications the UIQ look and feel which users are familiar with. The application framework and system services are the basis of the UI platform.

JavaTM

W950 supports Java™ ME CLDC 1.1

CLDC 1.1 JARs supported:

- JTWI 1.0 (JSR-185) consisting of CLDC (Connected Limited Device Configuration) 1.1 HI (JSR-139), MIDP 2.0 (JSR-118), WMA 1.1 (JSR-120).
- PDA PIM and File Access (JSR-75).
- Bluetooth wireless technology (JSR-82).
- Wireless Messaging API 2.0 (JSR-205).
- Web Service (JSR-172).
- Mobile Media API (JSR-135).
- Mobile 3D Graphics (JSR-184).
- Nokia UI API 1.1.

W950 consumer package

The exact contents of the W950 package depend on the localization.

The basic contents are as follows:

- W950 with stylus.
- Battery.

- Stereo headset with remote control.
- Travel charger.
- USB cable.
- User documentation package.
- Sony Ericsson PC Suite CD.
- Pouch.

Accessories

Accessories	Product name	
Batteries		
Standard Battery	BST-33	
Chargers/Desk Stands		
Micro Travel Charger	CMT-60	
Desk Stand	CDS-60	
Charger	CST-60	
Car		
Cigarette lighter adapter	CLA-60	
Bluetooth Car Handsfree	HCA-60 and HCB-300	
Dedicated Car Holder for W950	HCH-67	
Universal Car Holder	HCH-60	
Handsfree		
Portable Handsfree	HPB-60 and HPE-60	
Sport Portable Handsfree	HPS-60	
Bluetooth Handsfree	HBH-200	
Akono TM Headset	HBH-300	
Akono TM Headset	HBH-600	
Akono TM Headset	HBH-602	
Akono TM Headset	HBH-605	

Akono TM Headset	HBH-608
Akono TM Headset	HBH-610
Akono TM Headset	HBH-620
Akono TM Headset	HBH-660
Akono TM Headset	HBH-662
Akono TM Headset	HBH-670
Entertainment	
Stereo Portable Handsfree kit	HPM-61
Ultra Style Stereo Portable Handsfree	HPM-70
Connectivity	
USB Cable	DCU-60
Imageware	
Executive Case	IEC-20
Stylus Pack	ISP-XX
Concepts	
Quick Install BT Car Kit	HCB-300

Technical specifications

General technical data

Product name	W950
System	Tri-band GSM Release 99 recommendations. GSM 900 (CTR 19 and CTR 20) GSM 1800 (CTR 31 and CTR 32) EGSM and WCDMA FDD mode supported Latin America 1800, 1900 and e-GSM mode supported.
Speech coding	HR, FR, EFR, AMR supported where available, for high speech quality.
Operating system	Symbian OS v9.1 UIQ 3.0
Processor	ARM
GSM SIM/ UMTS USIM card	GSM SIM - GSM 11.11, UMTS USIM - 3GPP™ TS 31.102. Small plug-in card, 1,8 V and 3 V.
Internal memory size	4 GB + 60 MB.
Data transfer speeds	USB High speed, up to 480 Mbps
Length	106 mm
Width	54 mm
Thickness	15 mm
Weight	112 g
Antenna	Built-in
Colours	Mystic purple
Battery	900 mAh

Screen

Display type	TFT
Display size	QVGA
Pixel size	240 x 320
Colour resolution	262 k
Screen surface	Touch-sensitive
Illumination	Variable intensity backlight

Performance and technical characteristics

Dimension	GSM 900/ E-GSM 900	GSM 1800	GSM 1900	WCDMA
Frequency range (MHz)	TX: 880 – 915 RX: 925 – 960	TX: 1710 – 1785 RX: 1805 – 1880	TX: 1850 – 1910 RX: 1930 – 1990	TX:1920 – 1980 RX:2110 – 2170
Channel spacing	200 kHz	200 kHz	200 kHz	5 MHz with 200 kHz channel rasters
Number of channels	174 Carriers *8 (TDMA)	374 Carriers *8 (TDMA)	299 Carriers *8 (TDMA)	277
Modulation	GMSK	GMSK	GMSK	QPSK
TX Phase Accuracy	< 5° RMS Phase error (burst)	< 5° RMS Phase error (burst)	< 5° RMS Phase error (burst)	Error Vector Magnitude: <17.5%
Duplex spacing	45 MHz	95 MHz	80 MHz	190 MHz
Frequency stability	+/- 0.1 ppm	+/- 0.1 ppm	+/- 0.1 ppm	+/- 0.1 ppm
Voltage operation (nominal)	3.6 V	3.6 V	3.6 V	3.6 V
Transmitter RF power output	33 dBm Class 4 (2 W peak)	30 dBm Class 1 (1 W peak)	30 dBm Class 1 (1 W peak)	24dBm Class 3 (0.25 W peak)
Transmitter Output impedance	50 Ω	50 Ω	50 Ω	50 Ω
Transmitter Spurious emission	< -36 dBm up to 1 GHz < -30 dBm over 1 GHz (according to GSM spec)	< - 30 dBm (according to GSM spec.)	< - 30 dBm (according to GSM spec.)	< -36 dBm up to 1 GHz < -30 dBm over 1 GHz (according to 3GPP™ spec)
Receiver RF level	Better than – 102 dBm	– 102 dBm	Better than – 102 dBm	Better than -106.7 dBm @ 12.2 kbps CS voice
Receiver RX Bit error rate	< 2.4%	< 2.4%	< 2.4%	< 0.1%

Current consumption, talk and standby times

Talk time	GSM up to 7.5 hours UMTS up to 2.5 hours
Operating time	Up to 8 hours Music playback up to 10 hours
Standby time	GSM up to 340 hours UMTS up to 250 hours

USSD technical data

Feature	Support
USSD support	GSM Phase 1/2 (Cross-phase compatibility). GPRS behaviour according to class B.
Mode support -mode	UI-mode supported. SAT initiated USSD supported.
UI-mode details	 It is possible to scroll the text up and down in USSD messages. It is possible to highlight embedded numbers and take actions accordingly.

GPRS technical data

Dimension	Support
Compatible GPRS and SMG specifications	Release 99 according to ETSI specification.
Data rates	Multislot class 10 supported (4+2) CS-1, CS-2, CS-3, CS-4 9,050 bps, 13,400 bps, 15,600 bps, 21,400 bps supported (network-dependent).
Medium Access Modes	Dynamic allocation
Support of Packet Control Channels (PBCCH/PCCCH)	Yes
Network operation mode	NOM I, II, III
Support of GPRS/CS combined procedures	Yes
Network control mode	NC0 and 2
Support of access in 2 phases	Yes
Support of PRACH on 11 bits	Yes
Support of GPRS re-selection C31/C32	Yes

52

Dimension	Support		
Support of static and dynamic addressing	Yes		
Support of power control Uplink and Downlink	Uplink = yes, Downlink is a network	feature.	
Support of ciphering algorithms	GEA1, GEA2		
Support of compression algorithms	Yes, V42bis and IP header compression.		
Mode of operation	Class B and Class C modes of oper	ration supported.	
R Reference point	Physical layer: Support of RS232 PPP is supported as L2 layer in the R reference point Authentication algorithms PAP, CHAP supported		
IP connectivity	PDP type IP is supported IP termination in mobile or TE (laptop, PDA) supported		
PDP context	10 PDP context descriptions stored in mobile PDP context description is edited via application in mobile, AT-command or via OTA Simultaneous PDP contexts are supported, maximum 2.		
SIM	GPRS aware and non-GPRS aware SIM cards are supported.		
AT commands supported	AT+CGDCONT - DEFINE PDP CONTEXT AT+CGQREQ - Quality of Service Profile (REQUESTED) AT+CGQMIN - Quality of Service Profile (Minimum Acceptable) AT+CGATT - PACKET DOMAIN SERVICE ATTACH OR DETACH	AT+CGACT - PDP CONTEXT ACTIVATE OR DEACTIVATE AT+CGDATA - ENT	

GPRS maximum data rates (Kpbs)

		CS-1 9.05 Kbps	CS-2 13.5 Kbps	CS-3 15.6 Kbps	CS-4 21.4 Kbps
4 + 1	Rx	36.2	53.6	62.4	85.6
	Tx	9.05	13.4	15.6	21.4

HSCSD maximum Data Rates (Kpbs)

		9.6 Kbps per timeslot	14.4 Kbps per timeslot
2 + 1	Rx	19.2	28.8
	Tx	9.6	14.4

Hardware buttons

On/Off button.
Keypad with 12 keys.
Walkman® key
C (Cancel) key
Jog Dial, 3-way: up, down and inward.
Back button to switch back a view. Pressing and holding turns the keylock on and off when in standby view.
Play/stop button for the Walkman® player. Also mutes/unmutes the FM Radio.
Volume up/down rocker key. Long press on this button skips to previous or next track or radio station.

Text input

Hardware keypad with text prediction.

Handwriting recognition and on-screen keyboard with advanced text prediction, including automatic word completion and next word suggestion.

Third party application support

Note: The list below may be subject to future updates, that is, new applications may be added, others removed.

Application	
Abakus – Simple calculator, engineering calculator, unit converter, and mortgage calculator in one.	Try and buy
AccuWeather – Offers access to a wealth of world-wide weather. Detailed current conditions give the user a look at what the weather is currently doing for their location, or for any of thousands of locations around the world.	Try and buy
Audible – Digital audio books, newspapers and programs from Audible, the Internet's leading provider of spoken word audio.	Try and buy
Crystal Arabic (Psiloc) – Used to create, send and receive notes, sheets, documents, calendar entries, email, messages, contacts, and more in the Arabic language.	Try and buy
Crystal Hebrew (Psiloc) – Used to create, send and receive notes, sheets, documents, calendar entries, email, messages, contacts, and more in the Hebrew language.	Try and buy
Crystal Hindi (Psiloc) – Used to create, send and receive notes, sheets, documents, calendar entries, email, messages, contacts, and more in the Hindi language.	Try and buy
Crystal Thai (Psiloc) – Used to create, send and receive notes, sheets, documents, calendar entries, email, messages, contacts, and more in the Thai language.	Try and buy
Exchange ActiveSync – Secure, wireless and direct push synchronization with Microsoft Exchange Server 2003.	Free

Application	
IM+ – Five famous Instant Messaging (IM) services combined in one application: Yahoo, Google Talk, AIM, MSN and ICQ.	Try and buy
IntelliGolf Birdie Edition – "Best Sports Software". Includes golf scor- ing, wagering, shot tracking, and wire- less access to 20,000+ course scorecards worldwide!	Try and buy
Mahjongg – Single player game that probably originated in Asia. The objective of the game is to remove all the tiles from a layout.	Try and buy
McAfee VirusScan Mobile – The leading solution for real-time protection against viruses, worms, Trojans and so on.	Try and buy
QuickOffice – Can be used to view and edit Microsoft Word, Excel, PowerPoint and text documents. It can also be used to create new documents and spread sheets.	Try and buy
SlovoEd – Explanatory dictionary offering easy-to-use interface, rapid access and precise translations.	Try and buy
Wayfinder Navigator – Together with a Bluetooth GPS, turns the phone into a top-of-the-line GPS Navigator. Edi- tor's choice Mobile Magazine 2005.	Try and buy
WorldMate – World clock, global weather forecasts, comprehensive flight schedules for over 800 airlines, and much more.	Try and buy
Zingles – Also known as Sudoko, Zingles is a highly addictive logic puzzle game.	Try and buy

Walkman® player

File formats	.3ga - 3GPP™ Multimedia File .3gp - 3GPP™ Multimedia File .aac - Advanced Audio Coding .amr - Adaptive Multi-Rate Codec .au - uLaw/AU Audio File .imy - iMelody Ringtone Format .jts - MMAPI built-in Tone sequence .m4a - MPEG-4 Audio File .mid - Midi Melody (MusicDJ™) .mid - Scalable Polyphony MIDI .midi - Musical Instrument Digital Interface .mmf - SMAF (Synthetic music Mobile Application Format) .mp3 - MPEG Audio Stream, Layer III .mp4 - MPEG-4 Audio File .mxmf - Mobile XMF (eXtensible Music Format) .ra - Real Media .ram - Real Media .rmf - Beatnik Rich Music Format .rng - Nokia Format Ringing Tone .wav - Waveform Audio .wma - Windows Media Audio
Audio decoding	iMelody AMR-NB Midi SP-Midi XMF DLS MPEG-4 AAC-LC aacPlus (HE AAC, AAC+) Enhanced aacPlus (EAAC+) MPEG-1 1/2/2.5 Layer 3 (MP3) WAV Real Audio 9 WMA, Windows Media Audio 9

Video player

Ella Farmant	•	
File Format	.3gp ^a - 3GPP™ Multimedia File	
	.mp4 ^b - MPEG-4 Video File	
	.pvx - Packet Video Streaming	
	.ram - Real Media	
	.rm - Real Media	
	.sdp - SDP format	
	.wmv - Windows Media Video	
Streaming transport	RTSP according to 3GPP™	
Video decoding	MPEG-4 Simple Visual Profile Levels 0-3	
· ·	H.263 Profile 0 Level 10	
	H.263 Profile 3 Level 10	
	Real Video version 8	
	Real Video version 9	
	Windows Media Video 9	

a.AAC-LC and AMR-NB audio supported b.AAC-LC and AMR-NB audio supported

Pictures

Formats	JPEG, BMP, GIF (including animated), PNG, MBM, WBMP, SVG-tiny
Sharing via	IR, Bluetooth wireless technology, MMS, Email, PC file transfer, USB

Image decoders

Decoder	Details	Size	Colour depth	File format
GIF	87a/89a			
JPEG	 ISO/IEC JPEG Baseline DCT Progressive DCT Non-differential Huffman coding Symbol 'SOF2' 	Megapixel		• JFIF v1.02 • EXIF
ВМР	The bitmap image format used by Windows [®] .	XRAM dependent, default is VGA.	18-bit	
WBMP				
PNG				

Image encoders

Decoder	Details	Size	Colour depth	File format
GIF	89a			
JPEG	ISO/IEC JPEGBaseline DCTNon-differentialHuffman codingSymbol 'SOF0'	Megapixel		JFIF v1.02
ВМР	The bitmap image format used by Windows [®] .	XRAM dependent. Default is VGA.	18-bit	
WBMP				

Short message service

Feature	Support in W950
SMS Centre Number	It is possible to pre-record the SMS Centre Number.
Pictures	It is possible to insert a picture or an icon into the text message. EMS compliant mobile handsets will be able to see the picture correctly.
Input methods	Keyboard, on-screen keyboard, touch screen, predictive text input and multitap.
Reply to messages	It is possible to reply to received messages by MMS, SMS or phone call.
Copy, cut and paste words	Yes
Teaching of predictive words that are not in the predictive dictionary	Yes
Possibilities when creating a message:	
Save a sent message in a "sent items" folder	Yes
Insert a line in the message	Yes
Assign a validity period to the message	Yes
Print via IrDA	No
Use pre-defined messages	No
Possibilities when receiving a message:	
Reply to the sender	Yes
Forward the message	Yes
Save the message on SIM	No

Feature	Support in W950	
Get delivery time and date	Yes, but not via messaging	
Print via IrDA	No	
Possibilities of the previously sent message:		
Delivery report of the message	Yes	
Forward the message	Yes	
Save the message on SIM	Yes	
Know the remaining capacity storage	Yes	
Print via IrDA	No	
Possibilities of the previously received message:		
Reply to the sender	Yes	
Save the message in the Inbox	Yes	
Forward the message	Yes	
Know the remaining capacity storage	Yes	
Supported ways for replying to a received SMS:		
Via SMS	Yes	
Via phone call (set up a call to the number contained in the message body)	Yes	
Via USSD session	No	
Possibility to offer the user the ability of sending an SMS to a list of recipients	Yes, using phonebook groups or entering multiple numbers manually.	
Possibility to write an email address as a recipient address	· No	
SMS storage	In handset and SIM.	
Nokia Picture Messaging	No	

Enhanced message service

Feature	Support in the W950
	Enhanced Messaging Service (EMS) according to the standard 3GPP™ TS 23.040 v4.3.0, with the addition of the ODI feature from 3GPP™ TS 23.040 v5.0.0.
Number of messages that the handset is able to handle to generate a concatenated message	TBD

Feature	Support in the W950
Capacity storage	TBD
Outgoing messages	It is possible to: See how many short messages an EMS message consists of before sending it. Choose whether to send the message or not after writing it.
Incoming messages	 A signal is heard once all parts of the message have been received. It is possible to re-use the content of an EMS message Sounds, pictures, and animations can be inserted in a new message, if the object is not protected using ODI.
Concatenated messages	A receipt is received in the handset when all parts of a concatenated message have been delivered.
Insert objects	It is possible to add pictures, animations and sounds to ar EMS message.
Text formatting	 Centred, left and right aligned text. Small, normal and large font size. Bold, italic, underlined and strikethrough style.
Sounds	Chimes high, chimes low, ding, tada, notify, drum, claps, fanfare, chords high, chords low.
I-melody	Yes, version 1.2.
Melodies	 It is possible to: Send and receive melodies via EMS, if the melodies are not protected by copyright. Download melodies and commercial tunes. Create melodies.
WBMP	Yes
Picture sizes	16 x 16 mm, 32 x 32 mm, variable size in black and white
Pictures	 It is possible to: Edit pictures. Send and receive pictures via EMS, if the pictures are not protected by copyright. Create pictures. Download pictures. Receive pictures in enhanced messages originated by service providers.
Animations	The handset supports the following animations: I am ironic, I am glad, I am sceptic, I am sad, WOW!, I am crying. Plus the other nine animations defined in 23.040 v4.3.0. It is possible to send and receive animations.
TP-PID field value given by the handset before sending an EMS message	0x00

Multimedia messaging service

Feature	Support in the W950
Support of MMS protocol stack version	1.2
MMS/circuit switched parameters and MMS/ packet switched parameters placement	MMS is bound to a Data Account. A Data Account contains either circuit switched parameters or packet switched parameters.
Possibility to pre-configure the MMS parameters in factory	MMS circuit switched: YesMMS packet switched: Yes
Possibility to configure the MMS parameters by OTA provisioning	MMS circuit switched: YesMMS packet switched: Yes
Possibility for all the parameters from the parameters set to be OTA provisioned at the same time	MMS circuit switched: YesMMS packet switched: Yes
Possibility for only one parameter from the parameters set to be OTA provisioned	Using Device Management: • MMS circuit switched: Yes • MMS packet switched: Yes Using Client Provisioning: • MMS circuit switched: No • MMS packet switched: No
OTA provisioning solution	OMA Device Management and OMA Client Provisioning supported
MMS User Agent functional entity will be a separate entity from Web browser:	Yes
MMS User Agent support	OMA UAProf.
Supplier indication of realized interoperability tests between its MMS User Agent and MMS Relay/Server from other suppliers	Yes
Support of a standard or a proprietary procedure for OTA provisioning of MMS parameters	OMA Device Management and OMA Client Provisioning
Functionalities that the user is able to set during message composition:	 Message subject MSISDN recipient address email recipient address Message Cc recipient(s) address(es) delivery report request read-reply report request message priority validity period
From where can the user insert multimedia elements into multimedia messages:	Terminal memory
Supplier indication if MMS User Agent will be able to handle a network-based address book	No
Possibility for sent messages to be memorized into a folder in handset memory	Yes

62

Feature	Support in the W950
Actions that the user can perform after message notification:	Retrieve the message immediatelyDefer message retrievalReject message
Actions that the user can perform after message retrieval:	 Reply to the sender of the message Reply to the sender and to Cc people Forward the message Delete the message Save message into terminal
Multimedia codecs/formats supported for audio	AMR, MP3, AAC, WAV Depending on content class/creation mode settings, the following formats are also supported: AAC-LC AMR-NB SP-MIDI XMF DLS Real Audio
Multimedia codecs/formats supported for video	MP4, H263 Depending on content class/creation mode settings, the following format is also supported: Real Video
Multimedia codecs/formats supported for image	Baseline JPEG, wbmp, SVG, GIF 89a
MMS User Agent provides:	 Text formatting facilities (only text size) Coloured text/background (Viewer/player supports coloured text and background.) Keyboard, On-screen keyboard, touch screen and predictive text input.
Support of MMS protocol stack version	1.2
MMS/circuit switched parameters and MMS/ packet switched parameters placement	MMS is bound to a Data Account. A Data Account contains either circuit switched parameters or packet switched parameters.
Possibility to pre-configure the MMS parameters in factory	MMS circuit switched: YesMMS packet switched: Yes
Possibility to configure the MMS parameters by OTA provisioning	MMS circuit switched: YesMMS packet switched: Yes

SIM AT services supported

Service		Mode	Support
CALL CONTROL BY SIM			Yes
DATA DOWNLOAD TO SIM		Cell Broadcast SMS	Yes Yes
DISPLAY TEXT		Text of up to 240 characters (120 UCS2 coded).	Yes
	bit 1:	0 = normal priority	Yes
		1 = high priority	Yes
	bit 8:	0 = clear message after a delay	Yes
		1 = wait for user to clear message	Yes
GET INKEY		General: The GET_INKEY requires that the user confirms his/her choice	Yes
	bit 1:	0 = digits (0-9, *, # and +) only	Yes
		1 = alphabet set	Yes
	bit 2:	0 = SMS default alphabet	Yes
- -		1 = UCS2 alphabet	Yes
	bit 3:	0 = character sets defined by bit 1 and bit 2 are	Yes
		 enabled 1 = character sets defined by bit 1 and bit 2 are disabled and the Yes/No response is requested 	Yes
GET INPUT		General: No. of hidden input characters	252
	bit 1:	3 (, , , , , , , , , , , , , , , , , ,	Yes
		1 = alphabet set	Yes
	bit 2:	0 = SMS default alphabet	Yes
		1 = UCS2 alphabet	Yes
	bit 3:	0 = ME may echo user input on the display 1 = user input not to be revealed in any way (see note)	Yes
			Yes
	bit 4:	0 = user input to be in unpacked format	Yes
		1 = user input to be in SMS packed format	Yes
	bit 8:	0 = no help information available	Yes
		1 = help information available	Yes
LAUNCH BROWSER			Yes
MORE TIME			Yes
PLAY TONE			Yes

Service	Mode	Support
POLLING OFF		Yes
POLL INTERVAL		Yes
PROVIDE LOCAL INFORMATION	'00' = Location Information (MCC, MNC, LAC and Cell Identity)	Yes
	'01' = IMEI of the ME	Yes
	'02' = Network Measurement results	Yes
	'03' = Date, time and time zone (DTTinPLI)	Yes
	'04' - Language setting	Yes
	'05' - Timing setting	Yes
REFRESH	General: The reset option requests the user to wait while the phone restarts	Yes
	'00' =SIM Initialization and Full File Change Notification	Yes
	'01' = File Change Notification	Yes
	'02' = SIM Initialization and File Change Notification	Yes
	'03' = SIM Initialization	Yes
	'04' = SIM Reset	Yes
SELECT ITEM		Yes
SEND DTMF		Yes
SEND SHORT MESSAGE bit 1:	0 = packing not required 1 = SMS packing by the ME required	Yes Yes
SEND SS		Yes
SEND USSD		Yes
SET UP CALL	General: Capability configuration Set up speech call CallParty Subaddress DTMF support	Yes No Yes
	'00' = set up call, but only if not currently busy on another call	Yes
	'01' = set up call, but only if not currently busy on another call, with re-dial	Yes
	'02' = set up call, putting all other calls (if any) on hold	Yes
	'03' = set up call, putting all other calls (if any) on hold, with re-dial	Yes
	'04' = set up call, disconnecting all other calls (if any)	Yes
	'05' = set up call, disconnecting all other calls (if any), with re-dial	Yes

Service	Mode	Support
SET UP EVENT LIST	'00' = MT call	Yes
	'01' = Call connected	Yes
	'02' = Call disconnected	Yes
	'03' = Location status	Yes
	'04' = User activity	Yes
	'05' = Idle screen available	Yes
	'06' = Card reader status	Not Applicabl e
	'07' = Language selection	Yes
	'08' = Browser termination	Yes
	'09' = Data available	No
	'OA' = Channel status	No
SET UP IDLE MODE TEXT		Yes, 1 row of text is supported
SET UP MENU		Yes
TIMER MANAGEMENT		Yes
OPEN CHANNEL		No
CLOSE CHANNEL		No
RECEIVE DATA		No
SEND DATA		No
GET CHANNEL STATUS		No

User interaction with SIM AT

Display text

Text of up to 240 characters (120 UCS coded) is supported.

Text clearing times are 5-20 seconds and a 60 second timeout limit for the user to clear the text. 'Key' responses:

• 'Long Back' – Proactive session terminated by user.

'Back' - Backward move in proactive session.

Any other key clears the display if the command is performed successfully.

Get inkey

Prompt for a one-character input. Pressing 'Ok' without entering a character gives warning message "Minimum 1 character". 'Key' responses:

- 'C' clears current character.
- 'Long Back' terminates the proactive session.
- 'Back' Backward move in proactive session.
- 'OK' Command performed successfully.

Get input

Prompt for character input. The phone will refuse to accept further input when maximum response length is exceeded. UI Maximum Response lengths:

- Digits Only 160 characters.
- SMS default alphabet characters 160 characters, or 1530 characters if concatenation is activated.
- Hidden Characters (digits only) 20 characters.

'Key' responses:

- 'C' clears current character.
- · 'Long Back' terminates the proactive session.
- 'Back' Backward move in proactive session.
- 'OK' Command performed successfully.

Navigational key press down – Scroll down list.

- Navigational key press up Scroll up list.
- Long 'Back' terminates proactive session.
- 'Back' Backward move in proactive session.
- 'OK'- Command performed successfully.

Send short message

Default message "Sending message, please wait" can be replaced for the Alpha Identifier text, or suppressed completely if a null text is provided. Default responses are "MESSAGE FAILED" or "MESSAGE SENT". 'Key' responses:

Long 'Back' or 'Back' ends the proactive session.

Set up call

If the ME is on a call when the command 'Set up Call', 'putting all other calls on hold' is sent, the user will see the text 'Setting up a call current call will be held'. If 'OK' is pressed the current call will be put on hold and the new call set up.

Select item

Scroll to highlight item for selection. 'Key' responses:

Integrated browser technical data

Security	WTLS Class 1, 2, 3; WTLS Cipher RC5 with key length 128TLS/ SSL; TLS Cipher RC4 with key length 128SignText
Certificates	Predefined: Baltimore, Entrust, GlobalSign, GTA Cybertrust, RSA, Thawte and VeriSign.

Security

Data protection	SIM PIN (at power on)Device Lock (at power on and/or activated by screen saver)
Browser	TLS, SSL, WTLS, Certificate handling
Third party applications	Support for signed applications

Abbreviations

ЗGPPTM

3rd Generation Partnership Project.

AAC

Advanced Audio Codec.

ALS

Alternate Line Service. A system that allows a user to have more than one line allocated to a single SIM subscription.

AMR

Adaptive Multi-Rate. A variable rate speech coding (compression) method selected by the 3GPP™ for the 3G evolution of the GSM phones.

API

Application Programming Interface

AU, .au

Format for audio data files.

Bluetooth

Bluetooth wireless technology is a secure, fast, point-to-multipoint radio connection technology. It is a specification for a small-form factor, low-cost radio solution providing links between mobile computers, mobile phones and other portable handheld devices, and connectivity to the Internet. Available from the Bluetooth Special Interest Group (SIG).

BMP

Microsoft Windows Bitmap. A graphics format defined by Microsoft supporting 1, 4, 8 or 18-bit colour depth. No compression, so files can be large.

bps

Bits per second - rate of data flow.

CB

Cell Broadcast. Type of SMS message.

cHTML

A version of HTML optimized for small devices.

CLDC

Connected Limited Device Configuration. The J2ME 'configuration' implemented in W950. CLDC specifies a runtime environment with specifically limited resources, suitable for memory-constrained devices.

CLI

Calling Line Identity. Shows the number of the person calling you in your mobile phone display. W950 will also display the name and photograph of the caller if they are in Contacts.

You can then make an informed choice as to whether or not to take the call. Bear in mind that not all numbers can be displayed. To use this service, it must be supported by your network.

COM Port

Defines a serial/RS-232 port within the Windows environment. May be physical (COM1 port on the rear of the PC) or virtual (COM5 port communicating with a PC card modem).

CS

Circuit Switched. Connection from A to B which has a fixed bandwidth and is maintained over a period of time, such as, a voice telephone call.

CS-1 to CS-4

Coding Scheme. Determines the data rate per timeslot in GPRS.

CSD

Circuit Switched Data. CSD is a GSM service providing a CS data connection at a rate of 9.6 or 14.4 Kbps.

CSS

Cascading Style Sheet. A feature of browsers.

DCIM

Digital Camera Images. The name of the root directory when storing images according to the Design rule for Camera File system (DCF) standard.

DRM

Digital Rights Management; controlling copying and distribution of contents, with respect to intellectual property rights.

DTMF

Dual Tone Multi Frequency. A method of coding digits as a combination of two audible tones.

DUN

Dial-Up Networking.

ECML

Electronic Commerce Modelling Language.

e-GSM

Extended GSM. New frequencies specified by the European Radio Communications Committee (ERC) for GSM use when additional spectrum is needed (Network-dependent). It allows operators to transmit and receive just outside GSM's core 900MHz frequency band. This extension gives increased network capability.

EMS

Enhanced Messaging Service. An extension of SMS enabling pictures, animations, sound and text formatting to be added to text messages. 3GPP™ has included EMS in the standards for SMS.

ETSI

European Telecommunications Standards Institute.

FCC

Federal Communications Commission. US government agency which regulates radio communications.

FR

Full Rate, speech coding.

GIF

Graphics Interchange Format. Format for storing images which also supports animated images. Highly compressed by limiting the colour palette to 16 or 256 colours.

G-MIDI

General MIDI. Specifies a minimum level of performance compatibility.

GPRS

General Packet Radio Services.

GSM

Global System for Mobile Communications. GSM is the world's most widely-used digital mobile phone system, now operating in over 160 countries around the world.

GSM 900

The GSM system family includes GSM 900, GSM 1810 and GSM 1900. There are different phases of roll-out for the GSM system and GSM phones are either phase 1 or phase 2 compliant.

GSM 1810

Also known as DCS 1810 or PCN, this is a GSM digital network working on a frequency of 1810 MHz. It is used in Europe and Asia-Pacific.

GSM 1900

Also known as PCS. Refers to a GSM system running in the 1900MHz band. Used in the USA and Canada, for instance.

HR

Half Rate, speech coding.

HSCSD

High Speed Circuit Switched Data.

HTML

HyperText Markup Language.

HTTP

HyperText Transfer Protocol.

IMAP4

Internet Message Access Protocol version 4. Used to collect email from a mail server. Has more features than POP3.

iMelody

A format for monophonic ringtones.

IrDA

Infrared Data Association.

ISDN

Integrated Services Digital Network. Can provide circuit-switched data connections in multiples of 64 Kbps.

ISP

Internet Service Provider.

J2ME™

Java2™ Micro Edition – an edition of the Sun Microsystems Java programming/runtime environment specifying two runtime environment 'configurations' aimed at small devices.

Java™ Phone

An API in Java™ used for interacting with a phone.

JFIF

JPEG File Interchange Format

JNITM

Java™ Native Interface

JPEG

Joint Photographic Experts Group, best known for the .JPG format for still image compression.

JVMTM

Java™ Virtual Machine

Kbps

Kilobits per second - rate of data flow.

KVM

'Kilo' Virtual Machine.

LAN

Local Area Network.

MAC Address

Media Access Control address. This is a hardware address that uniquely identifies each node on a network.

MBM

Multi Bitmap. Image file format on Symbian OS.

ME

Mobile Equipment. (Phone excluding SIM card)

MeT

Mobile Electronic Transactions. An initiative founded by Ericsson, Nokia and Motorola to establish a secure and consistent framework for mobile transactions.

MIDI

Musical Instrument Digital Interface. MIDI defines a protocol and file format which enables music to be described and stored in binary form.

MIDP

Mobile Information Device Profile. An API (or 'profile' in J2ME nomenclature) defined to enable a standard programming API for mobile devices. MIDP compliant applications execute in the restricted environment defined by the CLDC.

MIME

Multipurpose Internet Mail Extensions. A protocol defining how messages are sent on the Internet. MIME is used to describe how attachments are encoded and what type of data they contain.

MMS

Multimedia Messaging Service. Logical extension of SMS and EMS, MMS defines a service enabling sound, images and video to be combined into multimedia messages.

MMS-C

MMS Service Centre.

MO

Mobile Origination. Such as, an SMS message sent from a mobile terminal.

MP3

MPEG Audio Layer 3. An audio compression technology that is part of MPEG-1 and MPEG-2 specifications. Commonly used to distribute music on the Internet and on portable players.

MPEG

Moving Picture Experts Group. A working group of ISO/IEC in charge of the development of standards for coded representation of digital audio and video.

MS

Mobile Station. (Phone and SIM card)

MT

Mobile Termination.

OS

Operating System, such as Symbian OS, Linux, Microsoft Windows.

OTA

Over-the Air Configuration. To provide settings for the phone by way of sending a message, SMS, over the network to the phone. This reduces the need for the user to configure the phone manually.

PC

Personal Computer.

PCS

Personal Communications Services, often used to describe GSM1900 networks.

PDA

Personal Digital Assistant. A handheld computer having functions such as address book, calendar etc.

PDP

Packet Data Protocol.

Personal Java™

An edition of Java™ appropriate for mobile devices such as PDAs.

Phone book

A memory in the SIM card where phone numbers can be stored and accessed by name or position.

PIM

Personal Information Management. Generic term for applications such as Contacts, Calendar, Tasks etc.

PKI

Public Key Infrastructure.

PNG

Portable Network Graphics. Format for storing images on file with data compression but without lowering of quality (loss of information).

POP3

Post Office Protocol. Used to collect email from a mail server.

PSTN

Public Switched Telephone Network, such as, ordinary analogue phone line for speech and/or computer modem.

PTD

Personal Trusted Device. Concept in MeT.

QCIF

Quarter Common Intermediate Format. A video format size of 176 x 144 lines.

QQVGA

Quarter Quarter VGA, 160 x 120 pixels.

QVGA

Quarter VGA size, typically refers to a portrait oriented screen 240 pixels wide x 320 pixels high.

RAS

Remote Access Service.

RMF

Rich Music FormatTM A file format developed by Beatnik combining the compact size of MIDI files with the high quality of MP3 and WAV.

Rx

Receive.

SC

Service Centre (for SMS).

SDK

Software Development Kit.

SIM card

Subscriber Identity Module card – a card that must be inserted in any GSM-based mobile terminal. It contains subscriber details, security information and memory for a personal directory of numbers. The card can be a small plug-in type or credit card-sized, but both types have the same functions. W950 uses the small plug-in card.

SIM-AT

SIM Application Toolkit – a means of providing simple applications that are stored on the SIM card.

SMIL

Synchronized Multimedia Integration Language. Used by MMS to describe how media objects are to be played.

SMS

Short Message Service. Allows messages of up to 160 characters to be sent and received via the network operator's message centre to a mobile phone.

SMSCB

SMS Cell Broadcast.

SMTP

Simple Mail Transfer Protocol. Protocol used to send email from an email client via an SMTP server.

SIR IrDA

Standard IrDA, up to 115 kbps IrDA.

SS

Supplementary Service.

SWIM

A SWIM card is a SIM card containing a WIM.

T9

(Text on 9 Keys) A text input system from Tegic that adds intelligence to multi-tapping letters on a telephone keypad.

TCP/IP

Transmission Control Protocol/Internet Protocol.

TLS

Transport Layer Security. As used by Web browsers.

Tx

Transmit.

TTY (Teletypewriter)

A telecommunication device with a keyboard and a visual display that is used primarily by people who are deaf, hard of hearing, or have a speech disability.

UI

User Interface. Sometimes called 'Man-Machine Interface'.

UIQ

A customizable pen-based user interface for media-rich mobile phones that is based on the Symbian OS. It may be used as the basis for building an attractive and efficient UI.

URL

Uniform Resource Locator. Points to a service or information on the Internet.

USSD

Unstructured Supplementary Services Data. Narrow-band GSM data service. An example is, entering *79*1234# might return the stock price for stock 1234.

vCal; vCalendar

vCalendar defines a transport and platform-independent format for exchanging calendar and scheduling information for use in PIMs/PDAs and group schedulers. vCalendar is specified by IETF.

vCard

vCard automates the exchange of personal information typically found on a traditional business card, for use in applications such as Internet mail, voicemail, Web browsers, telephony applications, call centres, PIMs /PDAs, pagers, fax, office equipment, and smart cards. vCard is specified by IETF.

VGA

Video Graphics Array. Graphics standard introduced by IBM, having a resolution of 640 x 480 pixels.

VPN

Virtual Private Network.

WAP

Wireless Application Protocol. Handheld devices, low bandwidth, binary coded, a deck/card metaphor to specify a service. A card is typically a unit of interaction with the user, that is, either presentation of information or request for information from the user. A collection of cards is called a deck, which usually constitutes a service.

WAV

Waveform audio. Format for storing sound.

WBMP

Wireless BitMap. Part of the WAP specifications, an image format optimized for small mobile devices.

WBXML

Wireless Binary Extensible Markup Language.

WIM

Wireless Identity Module.

WMA

Windows Media Audio, a compressed audio file format developed by Microsoft.

WML

Wireless Markup Language. A mark-up language used for authoring services, fulfilling the same purpose as HyperText Markup Language (HTML) does on the World Wide Web (www). In contrast to HTML, WML is designed to fit small handheld devices.

WTLS

Wireless Transport Layer Security. Part of WAP, WTLS provides privacy, data integrity and authentication on transport layer level between two applications.

$\mathbf{X}\mathbf{H}\mathbf{T}\mathbf{M}\mathbf{L}^{\mathsf{TM}}$

Extensible Hypertext Markup Language.

XML

Extensible Markup Language.

Related information

Documents

- The W950 User Guide
- Sony Ericsson W950 FAQ

- AT Command Reference Manual
- WAP 2.0 Specifications

Links

- www.SonyEricsson.com
- www.SonyEricsson.com/fun/
- www.SonyEricsson.com/developer/
- www.SonyEricsson.com/support
- www.ericsson.com/mobilityworld/
- www.extendedsystems.com
- www.bluetooth.com
- · www.imc.org
- www.3gpp.org

- www.irda.org
- www.etsi.org
- www.wapforum.org
- www.imc.org/pdi/
- www.syncml.org
- www.w3.org/TR/SVGMobile/
- www.w3.org/TR/xhtml-basic/
- www.java.sun.com

Trademarks and acknowledgements

Adobe and Photoshop are either trademarks or registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.

Apple is a trademark of Apple Computer, Inc.

Bluetooth is a trademark or registered trademark of Bluetooth SIG Inc..

The IrDA Feature Trademark is owned by the Infrared Data Association and is used under licence therefrom.

Lotus Notes® is a trademark of International Business Machines Corporation in the United States, other countries, or both.

Memory Stick Micro[™], M2[™] and Mega Bass[™] are trademarks or registered trademarks of Sony Corporation.

MusicDJ™ and PlayNow™ are trademarks or registered trademarks of Sony Ericsson Mobile Communications AB.

Opera is a trademark of Opera Software ASA.

XHTML[™] is a registered trademark of the W3C.

WALKMAN is a trademark of Sony Corporation.

3GPP™ is a trademark of ETSI in France and other jurisdictions.

Microsoft®, Windows®, Outlook® and PowerPoint® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Java™ and all Java based trademarks and logos are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries.

End-user license agreement for Sun™ Java™ J2ME™.

- 1 Restrictions: Software is confidential copyrighted information of Sun and title to all copies is retained by Sun and/or its licensors. Customer shall not modify, decompile, disassemble, decrypt, extract, or otherwise reverse engineer Software. Software may not be leased, assigned, or sublicensed, in whole or in part.
- 2 Export Regulations: Software, including technical data, is subject to U.S. export control laws, including the U.S. Export Administration Act and its associated regulations, and may be subject to export or import regulations in other countries. Customer agrees to comply strictly with all such regulations and acknowledges that it has the responsibility to obtain licenses to export, reexport, or import Software. Software may not be downloaded, or otherwise exported or re-exported (i) into, or to a national or resident of, Cuba, Iraq, Iran, North Korea, Libya, Sudan, Syria (as such listing may be revised from time to time) or any country to which the U.S. has embargoed goods; or (ii) to anyone on the U.S. Treasury Department's list of Specially Designated Nations or the U.S. Commerce Department's Table of Denial Orders.
- 3 Restricted Rights: Use, duplication or disclosure by the United States government is subject to the restrictions as set forth in the Rights in Technical Data and Computer Software Clauses in DFARS 252.227-7013(c) (1) (ii) and FAR 52.227-19(c) (2) as applicable.

All other trademarks and copyrights are the property of their respective owners.

Index

Numerics	L	
3G43	Links	75
	Locks	42
A		
Accessories48	M	
Alarm23	Master reset	33
Area information26	Media memory	32
	Memory	32
В	Models	11
Bluetooth30	Multimedia messaging service (MMS)	62
Browser27	Multitasking	10
security28	MusicDJ	27
Business telephony20		
	N	
C	Notes	23
Calculator23		
Calendar22	0	
Connectivity30	OTA	41
Consumer package48		
Contacts22	P	
Controls and operation9	PC Suite	38
Converter24	Performance	51
	Performance and technical characteristics	51
D	Personalization	39
Digital Rights Management (DRM)38	Phone applications	20
	Picture Editor	
E	Picture Gallery	
Email24	Pictures	
push email25	PlayNow	
Enhanced message service (EMS)60	Positioning	
,	ŭ	
F	R	
Flight mode10	Ringtones	40
FM Radio19	RSS feeds	
G	S	
Games27	Screen saver	40
General technical data50	Security	25
GPRS45, 52	Browser	
*	Short message service (SMS)	59
I	SIM	
Image decoders58	AT services	64
Image encoders59	card lock	42
IR32	card type	
	Sound recorder	
J	Speed dial	
Java47	Standby time	
	Stopwatch	
	Storage	
	-	

Symbian OS	45
Synchronization	
SyncML	34
<u> </u>	
Т	
Talk time	52
Task manager	10
Technical specifications	
Text input	
Themes	
TrackID	23
U	
UIQ	47
USB	32
USIM	50
USSD	52
V	
Video player	20, 58
•	,
W	
WALKMAN player	9, 19, 57