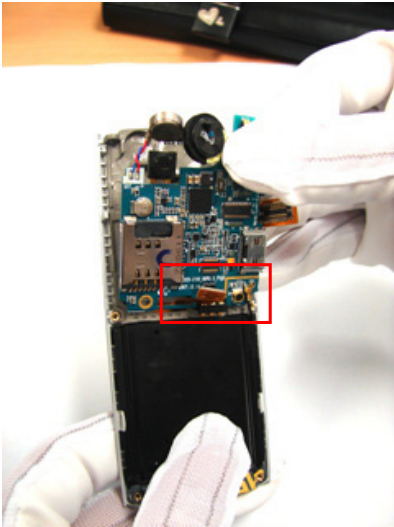
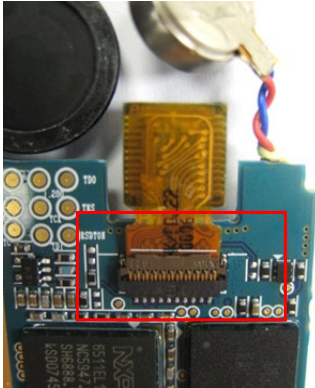
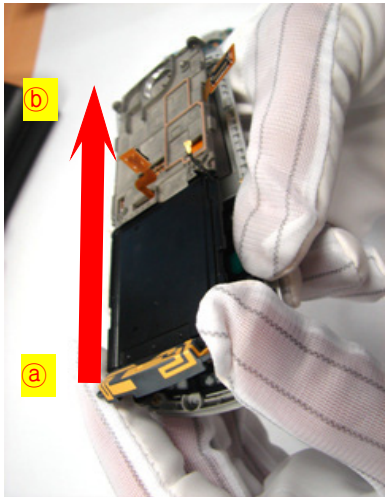



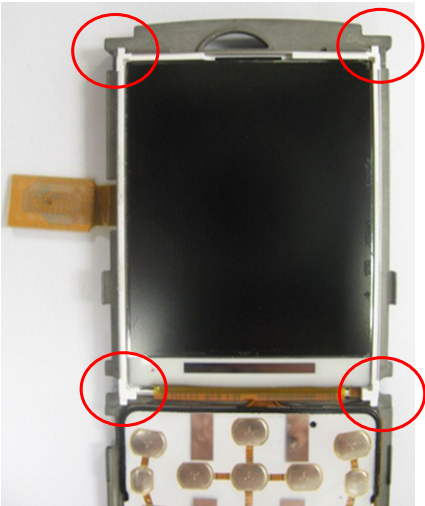
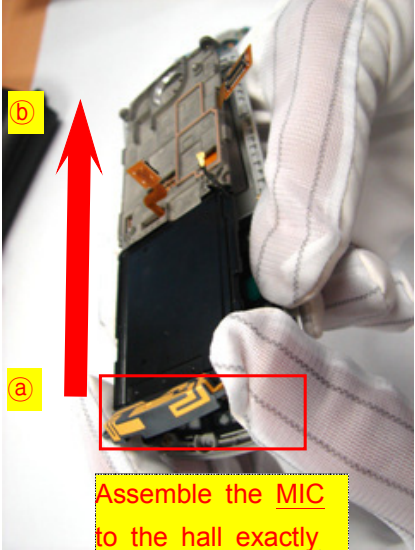
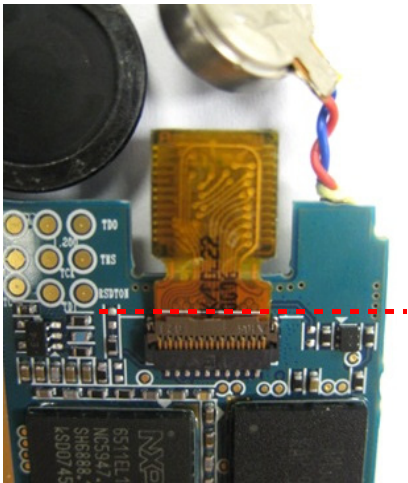

7. Disassembly and Assembly Instructions


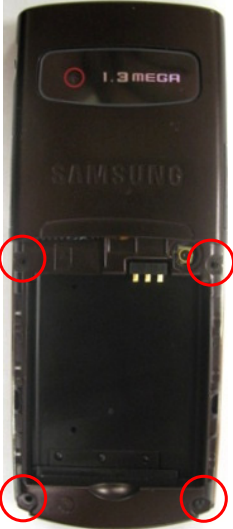
7-1. Disassembly

<p>1</p> 	<p>2</p> 
<p>1) Detach Cover from a set 2) Release SCREW 2 POINTS at top</p> <p>* Caution</p> <p>1) Be careful not to make scratch and molding damage!</p>	<p>1) Release SCREW 4 POINTS at Rear</p> <p>* Caution</p> <p>1) Be careful not to make scratch and molding damage!</p>
<p>3</p> 	<p>4</p> 
<p>1) Seperate connectors from the PBA</p> <p>* Caution</p> <p>1) Be careful not to make scratch and molding damage!</p>	<p>1) Release SCREW 2 POINTS at Rear</p> <p>* Caution</p> <p>1) Be careful not to make scratch and molding damage!</p>

<p>5</p> 	<p>6</p> 
<p>1) Detach the motor and speaker 2) Separate the PBA from the bracket</p> <p>※ Caution</p> <p>1) Be careful not to make scratch and molding damage! 2) Beware that you do not damage F-PCB.</p>	<p>1) Separate the camera after release the connector</p> <p>※ Caution</p> <p>1) Be careful not to make scratch and molding damage! 2) Beware that you do not damage F-PCB.</p>
<p>7</p> 	<p>8</p> 
<p>1) Separate the bracket from ① to ②</p> <p>※ Caution</p> <p>1) Be careful not to make scratch and molding damage!</p>	<p>1) Detach the LCD from the bracket</p> <p>※ Caution</p> <p>1) Be careful not to make scratch and molding damage!</p>

7-2. Assembly

<p>1</p> 	<p>2</p>  <p>Assemble the <u>MIC</u> to the hall exactly</p>
<p>1)Set the LCD to the bracket ※ Caution 1) Be careful not to make scratch and molding damage!</p>	<p>1) Assemble the bracket from ① to ② ※ Caution 1) Be careful not to make scratch and molding damage! 2) Arrange Inttena's WIRE not to be interfered with other components.</p>
<p>3</p> 	<p>4</p> 
<p>1) Assemble the camera with guide line ※ Caution 1) Be careful not to make scratch and molding damage! 2) Beware that you do not damage F-PCB.</p>	<p>1) Attach motor and speaker after twist wires 2) Assemble PBA to the bracket ※ Caution 1) Be careful not to make scratch and molding damage! 2) Arrange Inttena's WIRE not to be interfered with other components. 3) Beware that you do not damage F-PCB.</p>

<p>5</p> 	<p>6</p> 
<p>1) Drivers 2 screws on the PBA. * Caution 1) Be careful not to make scratch and molding damage!</p>	<p>1) Driver 4 screws on the PBA after assemble the REAR * Caution 1) Be careful not to make scratch and molding damage! 2) Arrange Inttena's WIRE not to be interfered with other components.</p>
<p>7</p> 	<p>8</p>
<p>1) Driver 2 screws at top 2) Attach the Cover from a set * Caution 1) Be careful not to make scratch and molding damage!</p>	