

Process Flow, Electrical


Applicable for G900

Contents

1	Process Flow	.2
	Process Description	
3	Revision History	5



1 Process Flow

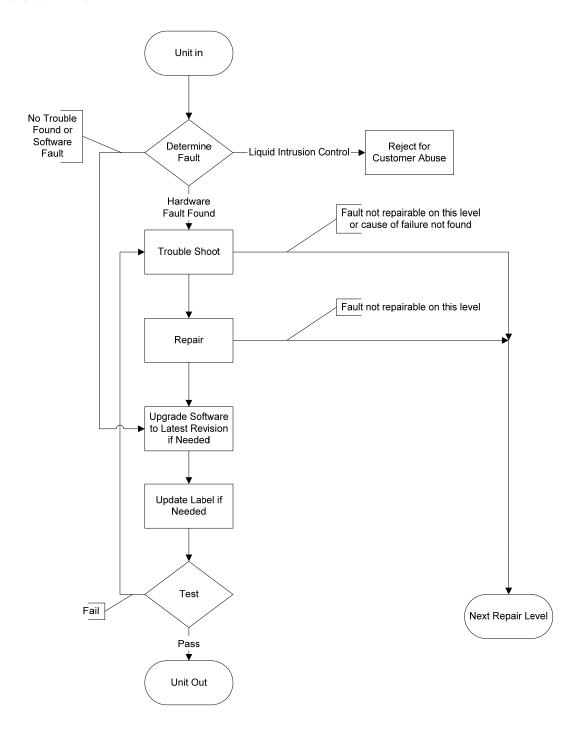




2 Process Description

Box	Reference
Unit in	Process the phone according to local requirements.
Determine Fault	Test Instruction, Mechanical and Electrical
	Determine if the phone is faulty or not, and try to confirm the
	customer's complaint. Only perform those tests necessary to
	confirm the failure.
	If a hardware fault is found, or a hardware and software fault is
	found, then continue with Trouble Shoot.
	If only a software fault is found, then continue with Upgrade
	Software to Latest Revision, Test, and Unit Out.
	Report as SW upgrade.
	If no hardware or software fault is found, then continue with
	Upgrade Software to Latest Revision, Test, and Unit Out.
	Report as No Trouble Found, NTF.
	If liquid intrusion or other shupe is found, then continue with Deignt
	If liquid intrusion or other abuse is found, then continue with Reject for Customer Abuse.
Reject for Customer	Test Instruction, Mechanical
Abuse	If liquid intrusion or abuse is found, then reject the product
Abuse	according to local requirements.
Trouble Shoot	Trouble Shooting Guide, Mechanical and Electrical
Trouble officer	Determine the cause of the failure. Trouble-shoot the phone
	according to the guide for the most common faults.
Repair	Working Instruction, Mechanical and Electrical
rtopan	Repair the faulty phone according to the instruction. Replace parts
	as required. (Product Change Survey, Mechanical)
	Flashing the latest software into the phone at this point may
	"repair" some problems.
	If a repair that requires calibration has been done, then calibrate
	the unit in SERP. (Test Instruction, Electrical)
	Calibration can only be done by authorized repair locations.
Upgrade Software to	Product Change Survey, Mechanical
Latest Revision if	Upgrade the software to the latest revision if needed.
Needed	
Update Label if Needed	Working Instruction Mechanical
Tool	Print and apply a new label if needed.
Test	Test Instruction, Mechanical and Electrical
Unit Out	Perform all tests as described in the instruction.
Unit Out Escalate	Process and package the phone according to local requirements.
Escalate	If the cause of the failure cannot be found or is not reparable at this
	level, then the product can be Scrapped, Swapped, or returned to the customer at the customer's request.
	ווום טעאנטווופו מג נוום טעאנטווופו א ופייענפאנ.
	Scrap: According to local directives
	Corap. 7.000raing to local directives
L	1

1210-5412 Rev1 3(5)





Swap: Swap the phone according to the instruction in Customization Instruction, Build Swap and according to local
directives.

1210-5412 Rev1 4(5)



3 Revision History

Rev.	Date	Changes / Comments
1	2008-03-19	Initial Release

1210-5412 Rev1 5(5)